




The FME inverter generators are simple to use and silent. They integrate practical equipment like overload indicator, oil alert and ECO throttle switch. Equipped with inverter regulation, they are able to handle most domestic equipments. Their noise level make them ideal for most home and recreational use. Compact, FME inverter generator are easy to transport and manipulate. The continuous work time between 6-7 hours, and user friendly circuit breaker in the event of an electrical overload, makes FME proud of it's complete line of gasoline generators.



The complete line of FME gasoline generators have been certified by the EPA (Environmental Protection Agency U.S.) and the CSA (Canadian Standards Association). The FME series of generator is covered by a one year limited warranty.

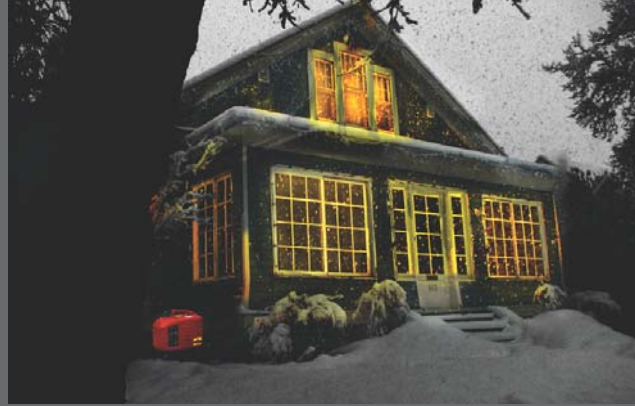

Distributed by :



**MTI Canada inc.**  
1720, boul. de la rive sud  
Saint-Romuald, Qc,  
G6W 5M6  
[www.mticanada.ca](http://www.mticanada.ca)

Your dealer :





**Compact, easy-to-use and easy to transport, FME professional generator.**

**XG-SF1000**



**XG-SF2000**



**XG-SF2600**



<b>Model</b>	SF-1000	SF-2000	SF-2600
<b>Generator type</b>	Digital inverter, Sine wave	Digital inverter, Sine wave	Digital inverter, Sine wave
<b>Engine</b>	XG I42F, 4 stroke OHV	XG I54F, 4 stroke OHV	XG I56F, 4 stroke OHV
<b>Displacement (cc)</b>	49 cc	133 cc	149 cc
<b>Compression ratio</b>	7.4	9.2	9.2
<b>Engine speed</b>	5500 rpm (Eco switch off)	5000 rpm (Eco switch off)	5000 rpm (Eco switch off)
<b>Cooling system</b>	Forced-Air cooled	Forced-Air cooled	Forced-Air cooled
<b>Ignition system</b>	T.D.I.	T.D.I.	T.D.I.
<b>Oil capacity (l)</b>	0.25l	0.7l	0.9l
<b>Fuel tank</b>	2.5l	7l	7l
<b>Spark plug</b>	NGK	NGK	NGK
<b>Noise level (7 m)</b>	58 db	65 db	58 db
<b>C.C. voltage</b>	12V/8.3A	12V/8.3A	12V/8.3A
<b>Maximum C.A. output (W)</b>	1000	2100	2700
<b>Maximum rated C.A. output (W)</b>	900	2000	2600
<b>Approximative continuous work time</b>	6 h	6.5 h	6.5 h
<b>Oil level indicator</b>	Standard	Standard	Standard
<b>Transportation wheels</b>	--	--	Standard
<b>Dimensions (mm):</b>			
<b>Length</b>	495	580	580
<b>Width</b>	275	320	310
<b>Height</b>	415	515	500
<b>Dry weight</b>	28lb	59lb	63lb