

Lights

Work lamps

**12306****12316****12326BK****9048****9050F
9056****9057****9082****9092****9269F****DA2200-42
DA2200-42H
DA2200-42H3****L940-12V
L960-12V**

Number	Description
12306	Round aluminium housing LED light, 2730 lm
12316	Square aluminium housing LED light, 3120lm
12326BK	Square aluminium housing LED light 5" x 4.4" x 1.75"; 1620 lm
9048	Rectangular rubber LED lamp, 800lm
9050F	Round rubber LED lamp, 800lm
9056	Round aluminum LED lamp, 1350lm
9057	Square aluminum LED lamp, 1350 lm
9082	Double stack LED work light bar evolutione serie, 2700lm
9092	14.5" evolutione 1 stack light bar, 2700lm
9269F	5.7" oval 18w LED work light
DA2200-42	Round rubber light 12V with 4411C bulb
DA2200-42H	Round rubber light 12V halogen with H7610 bulb
DA2200-42H3	Round rubber light 12V halogen with H312V55W bulb
L940-12V	Halogen lamp 12V
L960-12V	Halogen lamp 12V flood

Prices are subject to change without notice. Models may differ slightly from the picture.

Lights

Beacons

**2512****454101HL****5524****745282****803AA****804BA****806B3P****867B32W****901****902****903**
DA2600-03
DA2600-0024
DA2600-10

Number	Description
2512	12" LED permanent mini bar
454101HL	High lighter LED lightbar 15.8"
5524	24" LED amber heavy duty mini bar
745282	22" Emergency Turbo beam light bar
803AA	120 LED's beacon with amber dome
804BA	120 LED's amber high profile beacon
806B3P	Permanent mount amber beacon 12/24V
867B32W	32 LED's amber mini light bar with magnetic mount
901	Angled beacon bracket
902	Straight beacon bracket
903	Threaded mounting pin with rubber cover for 803AA & 804BA
DA2600-0024	24V rotoflex beacon amber
DA2600-03	Rotoflex beacon amber
DA2600-10	Mounting pin threaded for DA2600-03

Prices are subject to change without notice. Models may differ slightly from the picture.

Lights




Warning lights

**3242-3243****70030****706219****9524****DA2900-20K****DA2900-22K****DA2900-10K**

Number	Description
3242	Nite-gard warning light system 36" - 52" with horizontal bracket
3243	Nite-gard warning light system 36" - 52" with vertical bracket
70030	Replacement light 3241-3243
706219	Double face warning lamp
9524	Battery portable LED warning light
DA2900-10K	Trailer lamp bar 5' 3.5"
DA2900-20K	Magnetic rear lighting set, 12m cable, bulbs included
DA2900-22K	Magnetic dual lighting kit 7.5 m cable length, bulbs included

Prices are subject to change without notice. Models may differ slightly from the picture.

Safety accessories

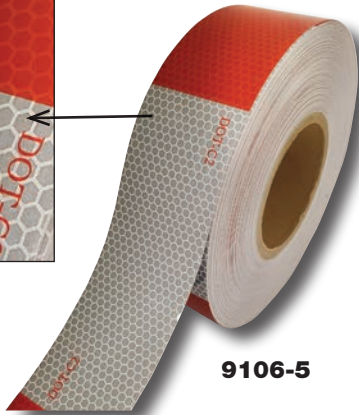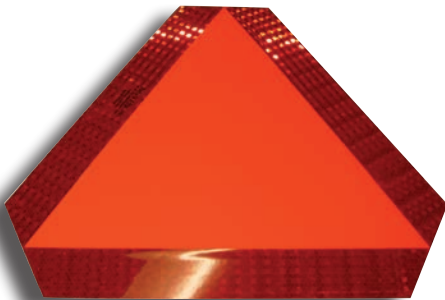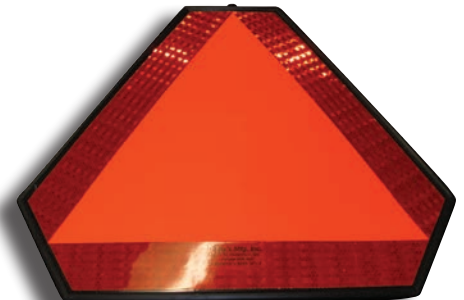**9106-5****95200R****95200Y****DA5060-11****DA5060-13****DA5060-31**

Number	Description	
9106-5	Reflective bicolored tape 2" x 150 ft - 6" red, 6" silver	
95200R	Red visibility adhesive tape 2" x 150 ft	
95200Y	Yellow visibility adhesive tape 2" x 150 ft	
DA5060-11	Metal SMV sign - High visibility	ASAE S276.6
DA5060-13	SMV sign decal - High visibility	ASAE S276.6
DA5060-31	Plastic SMV sign - High visibility	ASAE S276.6


Prices are subject to change without notice. Models may differ slightly from the picture.

LAMPE RECTANGULAIRE 4" X 6"
EXTRA-ROBUSTE "HALOGÈNE"

CARACTÉRISTIQUES



- VIE PROLONGÉE, ENVIRON 400 HEURES
- AMPOULE FACILEMENT REMPLACABLE
- ESSAIS DANS LE CHAMP SOUS CONDITION EXTRÊME
- 12 VOLTS ■ 55 WATT
- TRAPEZOIDAL ■ FLOT 80° x 30° ■ SPOT
- PLUS DE CLARTÉ (JUSQU'À 200,000 CHANDELLES)
- ADJUSTABLE
- EXTRA LARGE 4" x 6"
- TESTÉ EN LAB. JUSQU'À 6 G DE VIBRATION
- MONTABLE FACILEMENT SUR PIVOT
- ILLUMINE DES INSTRUMENTS DE 60 PIEDS DE LARGE

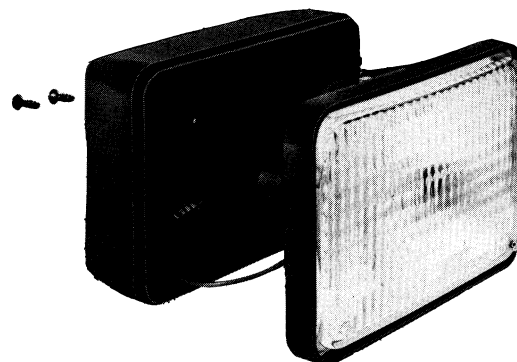

UTILISATION HORS ROUTE SEULEMENT

NUMÉROS NUMBERS	DESCRIPTION	
L4910	Sealed beam pour ancien modèle L910-12V.	
L940-12V	Lampe 4" x 6", Halogène 12V. (Trapezoidal)	Halogen lamp 12V, 4" x 6".
L950-12V	Lampe 4" x 6", Halogène 12V. (Spot)	Halogen lamp 12V, 4" x 6".
L960-12V	Lampe 4" x 6", Halogène 12V. (Flot 80° x 30°)	Halogen lamp 12V, 4" x 6".
L4970	Remplacement d'ampoule seulement pour modèle L940, L950, L960 Replacement bulb only for L940, L950 & L960.	

(VOIR VERSO POUR ILLUSTRATION)

LA TISCO 4" x 6"

HALOGÈNE

VOUS DONNE PLUS DE LUMIÈRE

TRAPEZOIDAL

TRAPEZOID

GRAND FLOT


FLOOD

SPOT

EASILY REPLACEABLE SEALED BEAMS AVAILABLE.

FOR OFF ROAD USE ONLY

Lampe extra-robuste halogène *Heavy duty halogen rubber lamp*

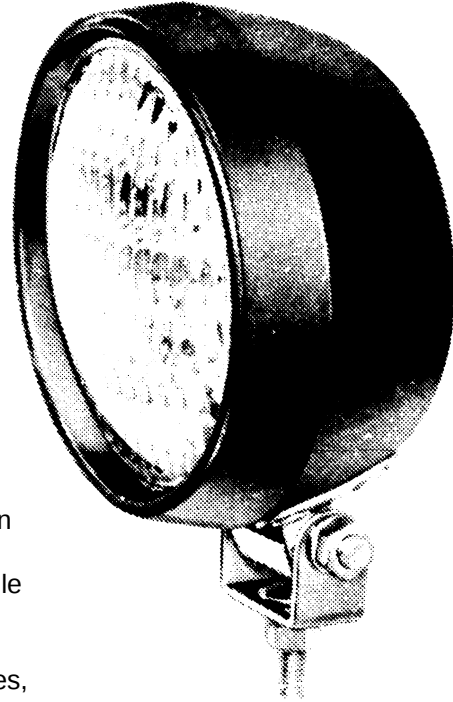

CARACTÉRISTIQUES :

- Lampe de caoutchouc qui élimine les chocs et la vibration
- L'unité scellée (*sealed beam*) s'attache facilement
- Plaque de montage de métal ajustable de façon universelle
- 4-7/8" 124 mm de diamètre total
- Lampe 4-7/8" en caoutchouc avec *sealed beam* H7610 halogène, 4-1/2" de diamètre, capacité de 5200 chandelles, faisceau trapézoïdal.

FEATURES :


- *Rubber body lamp helps eliminate shock and vibration*
- *Sealed beam unit snaps into lamp body*
- *Universal adjustable plated steel mounting bracket*
- *4-7/8" 124 mm Overall diameter*
- *H7610 12 volt sealed beam units, 4-1/2" diameter. Par 36 with special inner halogen bulb 50 watt, 3.9 amp. bulbs with 2 screw terminals*
- *5200 c.p. - trapezoidal lighting pattern*

NUMÉROS NUMBERS	DESCRIPTION
DA2200-42H	Lampe caoutchouc 4-7/8", halogène 12V. <i>4-7/8" diameter halogen rubber lamp 12V.</i>
DA2200-42H3	Même que ci-haut, mais avec ampoule halogène 5", H312V55W <i>Same as above but with halogen light bulb 5", H312V55W</i>

Projecteur halogène arrière pour camions et tracteurs de remorque *Halogen back-up light for trucks and semi*

DA2200-32H

Ampoule / Bulb : H3 12V 55W
Diam : 85 mm (3.33")

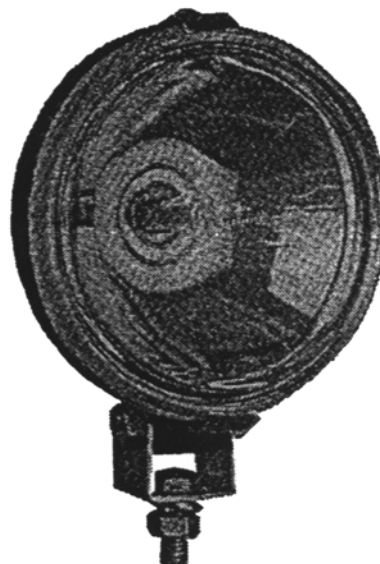

NUMÉROS NUMBERS	DESCRIPTION
DA2200-32H	Projecteur halogène arrière, Dia 3.3" 12V-55W <i>Halogen back-up light, 3.3" dia (H3) 12V-55W</i>
DA2200-321	Ampoule halogène H3, 12V, 100W <i>Halogen bulb H3, 12V, 100W.</i>
DA2200-325	Ampoule halogène H3, 12V, 55W (Voir numéro # L4970 p 1) <i>Halogen bulb H3, 12V, 55W. (See # L4970 p. 1)</i>
DA2200-341	Ampoule halogène H3, 24V, 100W <i>Halogen bulb H3, 24V, 100W.</i>
DA2200-347	Ampoule halogène H3, 24V, 70W <i>Halogen bulb H3, 24V, 70W.</i>

Lampe de travail 3" x 5" halogène / *halogen work light 3" x 5"*

(Mêmes caractéristiques que la Nite Fiter de notre page 55 et même *bulb* L4970)

Halogen Work Light

Announcing the addition of a 3" x 5" work light to our Nite Fiter Series 11 Lights

Our new 3" x 5" light has the same quality features as the 4" x 6" Nite Fiter listed in our current catalog.

- *Trim 3" x 5" rectangular shape, adjustable swivel mount.*
- *Flood, spot or trapezoidal beam pattern, precision faceted lens.*
- *Made for off road use only. Tough, vibration resistant.*
- *Replacement 55 Watt halogen bulb, 12 volt - 4.6 amp. (Use only 55 watt replacement bulbs.)*



UTILISATION HORS ROUTE SEULEMENT

NUMÉROS REPLACES NUMBERS	DESCRIPTION	
L710-12V	Lampe 3" x 5", halogène 12V.	<i>Trapezoidal pattern lamp assembly</i>
L720-12V	Lampe 3" x 5", halogène 12V.	<i>Spot pattern lamp assembly</i>
L730-12V	Lampe 3" x 5", halogène 12V.	<i>Flood pattern lamp assembly</i>
L4970	Ampoule pour L710, L720, L730.	<i>Replacement 55 watt halogen bulb</i>

Phare halogène pour tracteur / halogen tractor lamps



DA2200-52L
DA2200-52R



DA2200-4265



725074

NUMÉROS REPLACES NUMBERS	DESCRIPTION
DA2200-52L	Lampe halogène et feux de position, arrêt et virage (gauche). Hors-tout / Overall 191mm (H) 195mm (L) +100mm 145mm (P) (D) <i>Halogen lamp, position, turn & stop light (left)</i>
DA2200-52R	Lampe halogène et feux de position, arrêt et virage (droit) <i>Halogen lamp, position, turn & stop light (right)</i>
DA2200-104	Ampoule 12 volts (1157) <i>Bulb 12 volts (1157)</i>
DA2200-4265	Ampoule de remplacement 60/55W <i>Replacement bulb 60/55W</i>
725074	Lampe 4" x 6" (2 ampoules halogènes) / 4" x 6" lamp (2 halogen bulbs) 55W - 12V




Lampe caoutchouc rectangulaire
Rectangular rubber lamp

NUMÉROS NUMBERS	DESCRIPTION
DA2200-82H	Lampe caoutchouc rectangulaire 12V 55W Halogène Hors-tout / Overall 205mm (H) 185mm (L) 130mm (P) (D) <i>Rectangular rubber lamp 12V. 55W Halogen</i>
L4970	Ampoule de remplacement 55W Halogène <i>Replacement bulb 55W Halogen.</i>



41-720A

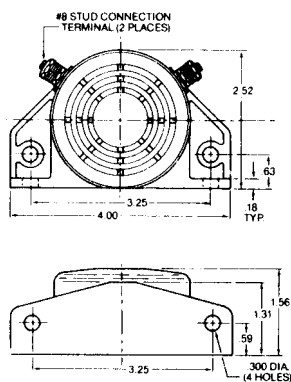

Simple niveau Pollalert 97 db (12-36 Volts) 41-720A

Le robuste et compact Pollalert permet le remplacement des alarmes inutilement larges et volumineuses couramment utilisées sur les camions à travaux légers et moyens, camions basculants, roulottes motorisées, campeurs, chariots élévateurs électriques et autres applications similaires.

Spécifications :

- Simple niveau...97dB (A) ± 4 @ 4'
- Multi-voltage - 12-36 volts, polarité protégée
- Pointe de voltage protégée
- Utilise moins de 0.1 ampère
- Semi-conducteurs électroniques
- Conforme à S.A.E. J994, type C
- Dimensions - 4" L x 2.0" D x 2.5" H
- Assemblage - deux trous de .300" de diamètre sur 3.25" de centres
- Poids net - 4.5 oz. (128 g)

Caractéristiques :

- Fait de plastique rigide et non-corrosif
- Nettoyable à la vapeur
- Peut être utilisé sur tout véhicule, mise-à-terre positive ou négative
- La dimension compact permet l'assemblage horizontal ou vertical

Single level Pollalert 97 db (12-36 Volts) 41-720A

The rugged and compact Pollalert allows replacement of unnecessarily large and bulky alarms currently used on light and medium duty trucks, dump trucks, motor homes, campers, electric fork lifts and other similar applications.

Specifications :

- Single level...97dB (A) ± 4 @ 4'
- Multi-voltage - 12-36 volts, polarity protected
- Voltage spike protected
- Current draw less than 0.1 amps
- Solid state electronics
- Certified conformance to S.A.E. J994, type C
- Size - 4" W x 2.0" D x 2.5" H
- Mounting - two .300" dia. holes on 3.25" centers
- Net weight - 4.5 oz. (128 g)

Features :

- Made of high impact, non-corroding plastic
- Steam cleanable
- Can be used on positive and negative ground vehicles
- Compact size allows for horizontal or vertical mounting in protected areas.

Pilot light

52-115




12 VOLT PILOT LIGHT. Red 1/2" diameter faceted lens.

For panel mounting through 5/16" hole.

Has snap-out socket for conventional bulb replacement.

Barre d'éclairage d'urgence / Warn-a-bars

Think of warn-a-bars as authority figures



PIÈCES DE REMPLACEMENT

REPLACEMENT PARTS :

411401 Moteur rotateur assemblé

OPTIONS / OPTIONS :

210386B Nécessaire de filage

Turbo Beam® 2000

Updated for the new millenium, the Turbo Beam® 2000 mini-lightbar now features improved rotators for better warning effectiveness.

Rotator enhancements include increased light output (80 000 candelas per flash) and increased flash rate (95 flashes per minute). These improvements make this popular mini-lightbar even more effective. All rotators have powerful halogen bulbs, precision parabolics reflectors, and RFI suppression drive motors for exceptional performance and reliability.



Models are available in 15" and 22" lengths and with flush or raised bases. The raised base speeds installation and maintenance.

Specifications :

Dimensions (L. x D. x H.) :	15"	15.0 in x 9.0 in x 5.0 in (381 mm x 229 mm x 127 mm)
	22"	22.0 in x 9.0 in x 5.0 in (559 mm x 229 mm x 127 mm)
Flash rate :	190 per minute (380 with mirror)	
Voltage :	12 VDC / 24 VDC	
Ship. weight :	15"	(5.0 lbs / 2.3 kg)
	22"	(6.0 lbs / 2.7 kg)
	add 2.0 lbs [0.9 kg] for mag. mount)	

NUMÉROS NUMBERS	DESCRIPTION	
732532	Lentille droite pour 415010 & 415011& 415111	Right end dome amber polycarb
732538	Lentille gauche pour 415010 & 415011 & 415111	Left end dome amber polycarb
205407	Ampoule halogène 50W (12V) (Ronde)	Halogen bulb 50W (12V) (Round)
745295	Ensemble de montage magnétique incluant la prise pour l'allumage-cigarette (210897). Pour barres d'éclairage de 15" et 22" seulement. <i>Light bar magnet mount kit includes cigarette lighter plug. For 15" and 22" light bars only.</i>	
745282 (415111)	Barre d'éclairage d'urgence, base 22" (415111), 2 ampoules halogène - coupole ambre (avec miroir) <i>Turbo Beam Mini Light Bar - 22" base, 50 watt quartz halogen bulbs - amber dome 2 rotating reflectors with center mounted full box mirror.</i>	
745283 (415011)	Même que 745282 mais avec base 15"	Same as 745282 but 15" to base
DA2600-20	Ampoule quartz halogène 12V (Modèle plat)	12V H1 Quartz halogen bulb (flat model)
732535	Lentille centre (ambre) pour 415111	Center dome (amber) for 415111
411014	Kit montage lampe rotative 15" (745283) 22" (745282)	Lamp mounting kit f/turbo beam, flush base 15" & 22"
439194	Kit de réparation pour lentille 745282-745283.	Lens repair Kit for lens 745282 - 745283 .
210897B	Nécessaire de montage magnétique série SC	Magnetic mount kit series SC

Lampe ROTOFLEX / ROTOFLEX beacon

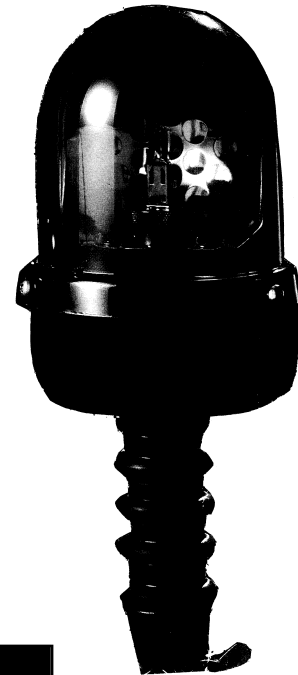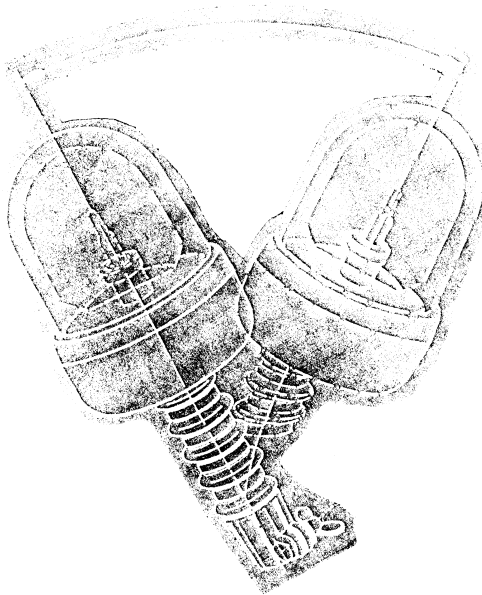


Rotoflex Beacon

(Pin Fixing)


Supplied complete with :
Amber Dome
12V H1 Quartz Halogen
Bulb

(Order pin separately -
see below for details)

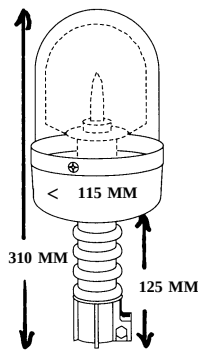

S. 14422
12V H1

S. 14423
24V H1

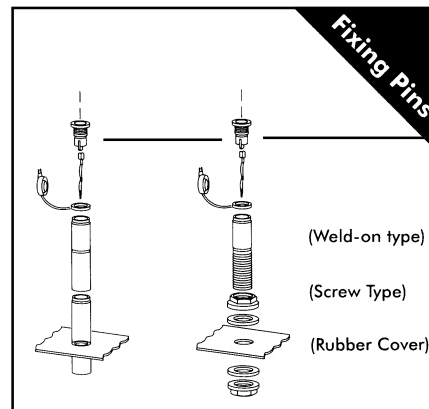


460520

DA2600-09



NUMÉROS NUMBERS	DESCRIPTION	
DA2600-00	Lampe rotoflex - ambre / sans tige (12V)	<i>Rotoflex beacon - amber w/o pin (12V)</i>
DA2600-0024	Lampe rotoflex - ambre / sans tige (24V)	<i>Rotoflex beacon - amber w/o pin (24V)</i>
DA2600-10	Tige de fixation filetée	<i>Fixing pin (Screw type)</i>
DA2600-11	Tige de fixation à souder	<i>Fixing pin (weld-on-type)</i>
DA2600-15	Caoutchouc de protection	<i>Rubber cover for fixing pin</i>
DA2600-20	Ampoule quartz halogène 12V. (55 Watts) (735259)	<i>12V H1 Quartz halogen bulb. (55 Watts)</i>
DA2600-21	Ampoule quartz halogène 12V. (100 Watts) (735260)	<i>12V H1 Quartz halogen bulb. (100 Watts)</i>
DA2600-31	Lentille de remplacement (ambre)	<i>Replacement lens (amber)</i>
DA2600-33	Lentille de remplacement (rouge)	<i>Replacement lens (red)</i>
DA2600-09	Base magnétique pour DA2600-00,02,05	<i>Magnetic base for DA2600-00,02,05</i>

Lampe rotative STD / STD rotative beacon

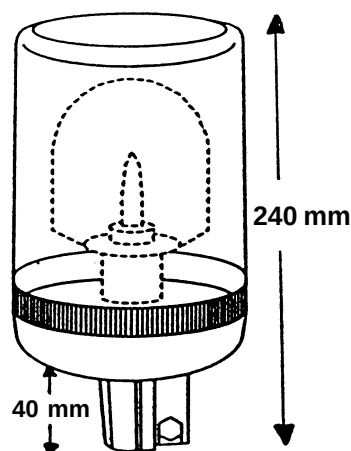


DA2600-02
Standard Beacon

(Pin Fixing)

Supplied complete with : Ambere dome

12V H1 Quartz Halogen Bulb

(Order pin separately - see below for details)




460520

DA2600-05

Bolt-on type.

Supplied complete with
unbreakable amber dome
(BOULONNE)

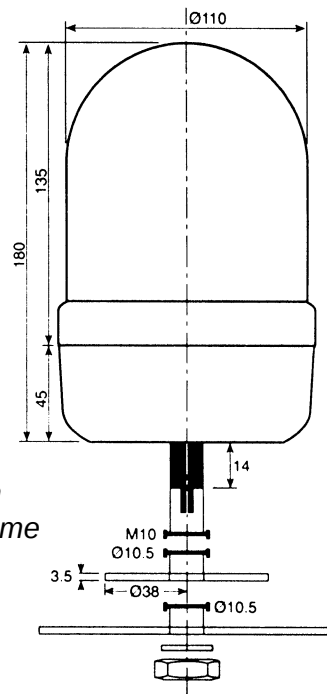

NUMÉROS NUMBERS	DESCRIPTION	
DA2600-02 DA2600-10 DA2600-11 DA2600-15 DA2600-20 DA2600-36	Lampe rotative std - ambre/sans tige Tige de fixation filetée Tige de fixation à souder Caoutchouc de protection Ampoule quartz halogène 12V. Lentille de remplacement (ambre)	Std beacon - amber w/o pin Fixing pin (Screw type) Fixing pin (weld-on-type) Rubber cover for fixing pin 12V H1 Quartz halogen bulb. Replacement lens (amber)
DA2600-05 DA2600-20 DA2600-31 DA2600-33	Lampe rotative - ambre (12V-24V) sans ampoule (Boulonné) Ampoule quartz halogène 12V. Lentille de remplacement (ambre) Lentille de remplacement (rouge)	Dual voltage beacon - amber bolt-on Bulb not included 12V H1 Quartz halogen bulb. Replacement lens (amber) Replacement lens (red)

Feux stroboscopiques pulsator® 551 PLUS robustes Pulsator® 551 PLUS heavy duty strobe beacons

The pulsator ® 551 Plus has been updated for improved performance. The Pulsator 551 Plus features a new state-of-the-art, 10-joule, power supply for improved light output and warning effectiveness. This high-profile strobe combines advanced dome optics with a high-performance power supply to produce a brilliant flash that meets SAE Class 2 requirements.

Pulsator 551 Plus strobes are exceptionally durable. The power supply is moisture and vibration resistant and protected against reverse polarity, voltage spikes and RFI. The patented base design and O-ring gasket combine to seal out moisture and contaminants. All models feature modular construction that provides quick access to internal components. The impact-resistant, polycarbonate, dome and base provide added durability in heavy-duty applications.

Heavy-duty models feature a gel-filled base that completely encases the power supply for extra protection against vibration and moisture. The encased power supply allows superior performance in extreme high-vibration environments.

Pulsator 551 Plus models are available in 10-joule (double & quad-flash), 12-48 VDC versions and 115 Volts (5-joule/single & double-flash) AC versions. All models use a helical strobe tube that is easily replaceable. All models include the necessary mounting hardware.



Specifications :

Dimensions (dia. x H.) : 6.5 in x 6.0 in
(165 mm x 152 mm)
Flash rate : 75/min. (Quad)
80/min. (Double)
70 min. (AC model)
Voltage : 12-48 VDC - 115 VAC
Amp draw : 1.2 @ 12 V to 0.3 @ 48 V
0.1 @ 115 V
Joules : 10 J (Double/Quad models)
5 J (AC models)
Output power : 13.3 W (Double)
12.5 W (Quad)
5.8 W (AC model)
Ship. weight : 1.5 lbs (0.7 kg)
1.9 lbs (0.9 kg)
(heavy duty)

PIÈCES DE RECHANGE / REPLACEMENT PARTS :


- * **439290** Tube de clignotement / flash tube
- * **208667** Lentille en polycarbonate ambre / amber polycarbonate lens
- * **208666** Lentille en polycarbonate bleue / blue polycarbonate lens
- * **208668** Lentille en polycarbonate rouge / red polycarbonate lens
- * **208669** Lentille en polycarbonate clair / clear polycarbonate lens
- * **208664** Lentille en polycarbonate vert / green polycarbonate lens

OPTIONS D'INSTALLATION / MOUNTING OPTIONS :

- * **200069** Fond en polycarbonate / polycarbonate bottom
- * **210890** Nécessaire d'installation magnétique /
Magnetic mounting kit
- * **210891** Nécessaire d'installation autocollante /
Self adhesive mounting kit
- * **210892** Nécessaire d'installation à ventouse /
Suction cup mount kit
- * **210893** Monture tubulaire de 1/2 po / 1/2" pipe mount
- * **210894** Monture tubulaire de 3/4 po / 3/4" pipe mount
- * **210895** Monture tubulaire de 1 po / 1" pipe mount
- * **210387** Nécessaire de filage, 1 feu / cable kit, 1 strobe
- * **210376** Nécessaire de filage, 2 feux / cable kit, 2 strobes

NUMÉROS NUMBERS	DESCRIPTION
745321 (211820)	Feu stroboscopique - modèle 551 (Pulsator) ambre (12-48VDC) 6" de haut - 6-1/2" Base Model 551 Pulsator - strobe light double flash - amber - (12-48VDC) 6" Tall - 6-1/2" dia base
210890	Ensemble de montage magnétique. Magnet mounting kit includes magnet, cigarette lighter plug, 10' cord bottom and mounting hardware.
211694	Feu stroboscopique - modèle 551 (Pulsator) ambre 120 FPM Amber strobe lamp (Pulsator 551) single flash 120 FPM - 15 Watts

Gyrophare d'urgence / flashing beacon

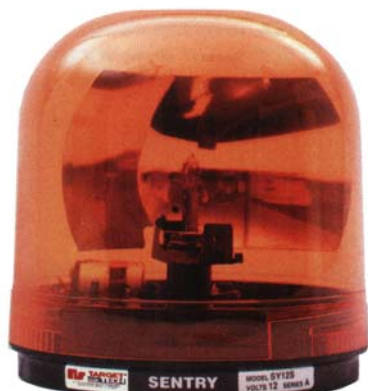
448112

212426

Halogen flashing beacon

For a dependable, effective warning light, halogen flashing beacons are the answer. These water-resistant beacons offer state-of-the-art technology and solid-state electronics. Each model has a 55-watt halogen bulb and durable polycarbonate base and dome. A halogen flashing beacon is an ideal supplemental warning light for trucks and maintenance vehicles. Models are available in low and high-profile versions. Simplified design allows the operator to service these beacons without removing them from the vehicle.

Effective

- Attention-getting flashing warning patterns.
- Advanced dome optics direct light for maximum effectiveness

Reliable

- Solid-state circuitry
- Serviceable without removing the beacon from vehicle
- Protected against moisture and contaminants

Durable

- Impact-resistant polycarbonate dome and base
- Protected against shock and vibration
- Corrosion resistant materials

Applications

- Tow and recovery vehicles
- Utility trucks
- Pickup trucks and suv's
- Electric vehicles

Specifications :

Dimensions (dia. x H.) : 6.5 in x 4.0 in (low)
6.5 in x 6.0 in (high)
(165 mm x 102 mm/152mm)

Flash rate : 60/min.

Voltage : 12 VDC

Amp draw : 4.3 @ 12 V


Ship. weight : 0.5 lbs (0.2 kg)

PIÈCES DE RECHANGE / REPLACEMENT PARTS :

- * **205408** Bulb, 12 VDC
- * **211261** Power supply, 12VDC, for low-profile model
- * **211262** Power supply, 12VDC, for high-profile model
- * **208762** Amber dome, low profile
- * **208667** Amber dome, high profile

NUMÉROS NUMBERS	DESCRIPTION
212426	Gyrophare d'urgence, ampoule 55W halogène, ambre (12 VDC). 55W halogen flashing beacon, amber, high profile (12 VDC).
448112	Feu rotatif ambre 95 FPM 12V Rotating beacon amber 12VDC - 95FPM

Accessoires pour panneau et feux arrière de remorque Trailer board and tail light accessories

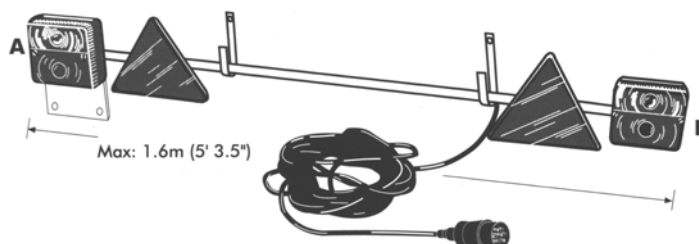

DA2900-10 Panneau de remorque robuste

Conçu pour fixation simple et permanente grâce à deux brides de support robustes et réglables. Le panneau de 1.6m est vendu complet avec feux arrière/clignotants combinés, réflecteurs triangulaires et 14m de câble à 7 conducteurs muni d'une fiche de raccordement DIN.

DA2900-10 Heavy duty trailer board

Designed for simple, permanent fixing by two robust, adjustable bracket clamps. The 1.6m 5ft 7in board comes complete with combination rear/flasher lamps, triangular reflectors and 14m 35ft of 7 core cable fitted with DIN connector plug.

DA2900-20



DA2900-01 Tail light assembly



This 4 function square rear lamp cluster comprises amber flasher, red tail light, red stop light and clear number plate illumination and comes complete with bulbs. Suitable for DA2900-00 trailer board.

Size 95 mm x 95 mm

3.3/4 in x 3.3/4 in

NUMÉROS NUMBERS	DESCRIPTION
DA2900-10 (DA2900-00)	Panneau de remorque (1,6 mètre). Feux et réflecteurs triangulaires. <i>Heavy duty trailer board (1,6m). Rear flasher lamps, triangular reflectors and 14 M (46 ft) of 7 core cable fitted with DIN connector plug.</i>
DA2900-01	Feu arrière clignotant pour DA2900-00 / <i>Comb rear / flasher lamp for DA2900-00.</i>
DA2900-02	Lentille de remplacement pour DA2900-00 / <i>Replacement lens assembly for DA2900-00</i>
DA2900-11	Assemblage feux arrières pour DA2900-10 / <i>Tail light assy for DA2900-10.</i>
DA2900-12	Ensemble de lentille remplaçant pour DA2900-10 / <i>Replacement lenns assy for DA2900-10.</i>
DA2900-20	Kit éclairage magnétique, 25 pieds fil / <i>Rear lighting set magnetic, 25 feet cable</i>


Ruban réflecteur / reflective tape and spitfires

Reflective tape

Effective 12-1-93, all new trailers 10,000 GVWR, and over 80" wide must have reflective tape. For side application, 2" wide or two 1" strips of red/silver tape must cover a minimum of 50 % of the trailer length. For rear application, 2" red/silver tape is to span the rear of the trailer, 2" red/silver tape on the horizontal bar of the I.C.C. bumper and 2", 12" silver strips in the upper corners.


High-brightness reflective material is rated at 1,000 candlepower and features industrial-strength adhesive to mount on flat or curved surfaces. Also offers : four-times greater reflectivity, wider viewing angles, higher visibility at long range and tougher durability. Rolls are 150 feet long and 1" or 2" wide with alternating strips of 7" of silver and 11" of red.

Kits contain eight - 18" strips packaged in a self-service, full-color poly pack with a header.

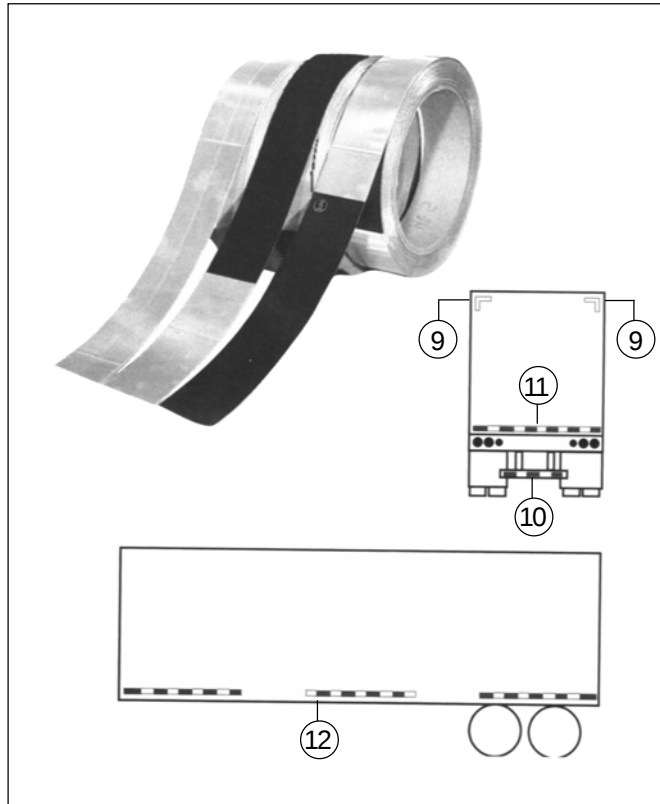

Order numbers		Pack	Std. Carton
465-1	2" red/silver alternate	box	1
465-5	1" red/silver alternate	box	1
465K	red/silver kit	Viz Pack	12
467K	silver kit	Viz Pack	12
468K	red kit	Viz Pack	12

DESCRIPTION				MANDATORY REQUIREMENTS		
Area	Conspicuity treatment	DOT Coding	Quantity	Color	Location	Height
9	Rear upper body markings	(DOT-C, -C2, -C3 or -C4)	Exactly 2 pairs	White	Rear upper corners facing rearward	At the top
10	Bumper bar marking	(DOT-C, -C2, -C3 or -C4)	Continuous	Red/white	Rear bumper bar's horizontal element full width - facing rearward	No requirement
11	Rear lower body marking	(DOT-C, -C2, -C3 or -C4)	Continuous	Red/white	Rear - not on bumper bar full width of the vehicle facing rearward	As horizontal as practicable and as close as practicable to the range of 375 to 1525 mm from the ground
12	Side marking	(DOT-C, -C2, -C3 or -C4)	See location	Red/white	Each side - facing sideward continuous, or evenly spaced over minimum of 50 % of length, starts and ends at the extremes of the vehicle	As horizontal as practicable and as close as practicable to the range of 375 to 1525 mm from the ground

**FEUX CLIGNOTANTS AUXILIAIRES**

Pour usage industriel ou d'appoint. Base en acier, lentille monobloc nervurée en acrylique, pièces entièrement encastrees. Les feux sont offerts avec un clignotant à charge variable et un commutateur rotatif de marche / arrêt. Ampoule 12V c.c. de 32 cd à contact simple no.1156. Ne se conforment pas nécessairement aux normes et aux règlements en vigueur pour les véhicules automobiles.

744001 ambre

AUXILIARY FLASHING LAMPS

For supplementary / industrial plant applications. Steel base plate, one piece fluted, acrylic lens, completely encases all parts. Lamps complete with variable load flasher and rotary on / off switch. Single contact bulb #1156, 32 C.P., 12 VDC. Not warranted to conform to motor vehicle standards or regulations.

744001 amber



766043 PORTE-FUSIBLE



766016 DISJONCTEUR

NUMÉROS NUMBERS	DESCRIPTION
744001	Feux clignotants auxiliaires (ambre) 12VDC <i>Auxiliary flashing lamp 12 VDC (amber)</i>
766016	Disjoncteur universel 30 ampères avec ou sans braquette <i>Universal Stud-Type circuit breakers with ou without bracket</i>
766043	Porte-fusible 6 positions à lame <i>Blade type fuse panel 6 pole</i>
766069	Relais 30 ampères - Relay replacement 30 A

Feu stroboscopique d'avertissement / Warning strobe light

Firebolt®

For dependable warning at an affordable price, count on the Firebolt® line of strobe beacons. All models feature modular construction for easy installation and maintenance. Power supplies are moisture and vibration resistant, and will automatically adjust to function at multi-voltages (see specifications). The impact-resistant, polycarbonate dome and base provide added durability in heavy-duty applications. Permanent and magnetic mount models are available and include the necessary mounting hardware.

Firebolt Plus

Firebolt Plus is available in a 2-joule (single-flash) version and features a replaceable flash tube. The modular construction allows the flash tube to be easily replaced without the use of tools.




745317

Specifications :		Options :	
Dimensions (dia. x h.) :	5.0 in x 3.6 in (127 mm x 91 mm)	210539	"L" bracket
Ship. weight :	0.7 lbs (0.3 kg)	210728	Magnetic mount kit with cigarette lighter plug
Flash rate :	60/min. (2 joule) 65/min (5 joule)	211676	Dome guard assembly
Voltage :	12-72 VDC (2 joule) 115 VAC (AC model) 12-48 VDC (5 joule)	210387	Wiring kit, one strobe
Joules :	2J (single flash) 5J (double flash)	210881	1/2" pipe mount adapter
Power :	2W (single flash) 5.4W (double flash)	210850	3/4" pipe mount adapter
		210882	1" pipe mount adapter
Replacement parts :			
		211300	Flash tube
		211550	2J, 12-72 VDC power supply
		205580	Amber dome
		200523	Dome gasket

NUMÉROS NUMBERS	DESCRIPTION
745317	Feu stroboscopique industriel ambre Industrial strobe light amber

Réflecteurs - Reflector

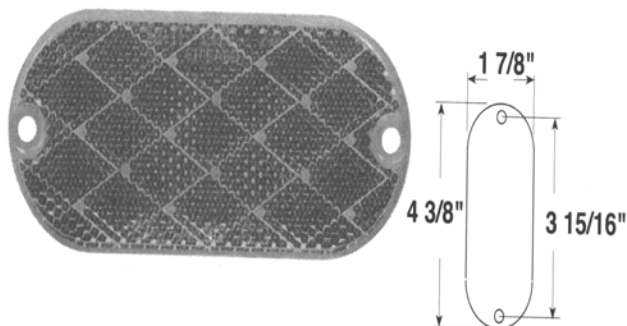


RÉFLECTEUR ALLONGÉ OBLONG

4-3/8" x 1-7/8" hermetically sealed reflector mounts on 3-5/16" centers.

Montage à 2 vis. - 2 screw mounting

716019	Réflecteur rouge - Red reflector
716020	Réflecteur ambre - Amber reflector

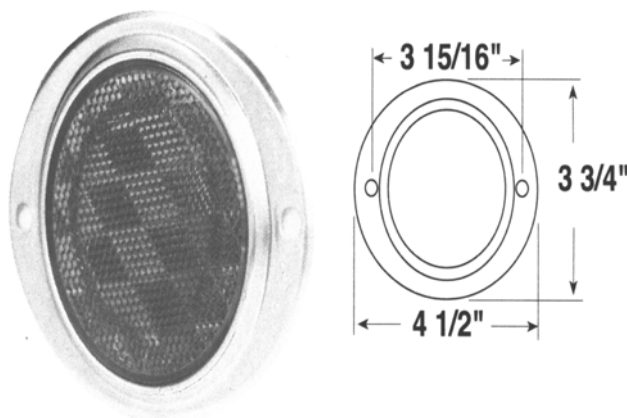

RÉFLECTEUR OVALE ALUMINIUM ALUMINUM OVAL

3" diameter acrylic lens in low-profile aluminum housing. Completely rustproof.

Montage à 2 vis. - 2 screw mounting

716509	Réflecteur rouge - Red reflector Voir V472R
716510	Réflecteur ambre - Amber reflector Voir V472R



RÉFLECTEUR ROND ROUND REFLECTOR

RÉFLECTEUR 2 3/16 Diamètre auto-adhésif
2 3/16 diameter reflector round self adhesive.

716038B	Réflecteur rouge qté 10 Reflector red round pk 10
716039B	Réflecteur ambré qté 10 Reflector amber round pk 10

Feu stroboscopique Renegade Renegade Strobebeacon



The Renegade[®] strobe breaks away from the pack and sets new standards for dependability and performance. The renegade strobe features a rugged, impact-resistant polycarbonate dome and base. The versatile base on model 462121 enables mounting via the permanent base, the trim ring (supplied), or the integrated 1/2-inch pipe mount. Model 462141 utilizes a magnetic mount and comes with a cigarette lighter plug.

For effective long-term operation, the renegade has a powerful flash tube (replaceable) and vibration-resistant circuit board. The 2.2-joule (2.6 watts) power supply automatically adjusts to function at any voltage from 12 to 72 VDC. This strobe has exceptional optics and meets SAE J1318 class 3 specifications. Renegade strobes are designed for reliable performance in the toughest environments. Applications include forklifts, electric vehicles, and industrial trucks and equipment. All models are supplied with an enclosed base and all necessary mounting hardware.

Specifications :	Options :
Dimensions (dia. x h.) : 462121 2.9 in x 4.4 in (73mm x 110mm) 462141 2.9 in x 4.4 in (73mm x 110mm) Flash rate : 70 ± 5 per min. Voltage : 12-72 VDC Amp draw : 0.3 @ 12 V Ship Weight : 0.9 lbs (0.4 kg) approx. Joules : 2.2 J Power : 2.6 W	462400 Magnetic mount kit Replacement parts : 462500-02 Amber dome 462510 Flash tube assembly 462520 Trim ring 462530 Dome gasket 462540 Mounting gasket

NUMÉROS NUMBERS	DESCRIPTION
462121	Feu stroboscopique ambre Strobe beacon amber
462141	Feu stroboscopique magnétique ambre Strobe beacon magnetic amber
462400	Ensemble de montage magnétique Magnetic mounting kit
462500-02	Lentille de remplacement ambre Replacement dome lens amber
462510	Tube clignotant Flashtube assy
462520	Anneau de finition Trim ring
462530	Joint de lentille Dome gasket
462540	Joint de montage Mounting gasket

Feux stroboscopiques junior Junior strobe lamp

This low profile strobe works in multiple voltages (12-48VDC) without requiring any modifications or adjustments. It is protected against reverse polarity and voltage spikes. The 401 strobe features a rubber base that resists corrosion, and absorbs harsh shock. This 5-joule strobe is also available with a magnetic mount that includes cord and cigarette lighter plug adapter.



Pièces de rechange / Replacement parts:

211141 Flash tube

211140 12-48 VDC power supply, single flash

601501 Amber dome

Options:

210387 Wiring kit, one strobe

210376 Wiring kit, two strobes

Spécifications:

Dimensions (dia. x H.) : 5.9 in x 5.7
(150 mm x 145 mm)

Joules: 5J

Power: 5.8W

Flash rate : 70/min.

Voltage : 12-48 VDC

Amp draw : 0.65 @ 12 V to 0.16 @ 48V

Ship. weight : 1.6 lbs (0.73 kg)
2.6 lbs (1.2 kg) magnet

NUMÉROS NUMBERS	DESCRIPTION
745266 (220300)	Feu stroboscopique junior 12-48 VDC volts (ambre) / Junior strobe lamp 12-48VDC volts (amber)
745270 (220308)	Même que 745266 mais magnétique / Same as 745266 but magnetic mount
735169 (211141)	Tube clignotant (tous les modèles) / Flash tube (all models)
731937 (601501)	Lentille ambre en polycarbonate / amber polycarbonate lens

Lampe rotative Sentinel / Sentinel rotating beacons

Sentinel

The innovative design of the Sentinel halogen beacon enables it to be both effective and economical. Corrosion-resistant, high-impact materials make the Sentinel beacon the durable, reliable choice. Its unique “brand drive” rotator operates quietly and efficiently. All Sentinel halogen beacons meet SAE J845 Class 2 specifications for rotating lights and also have CE and E approvals.

The “quick-change” base models allow you to replace damaged units in seconds. They also speed transfers from vehicle to vehicle. The flexible quick-change base provides an additional measure of protection from damage. If the light comes in contact with a branch or other obstruction, the flexible base will give. Both quick-change base models require the use of a quick-change mount.



Specifications :	Options :
Dimensions (dia. x h.): 5.2 in x 12.4 in (132 mm x 315 mm) Ship. weight : 1.5 lbs (0.7 kg) approx. Flash rate : 120 per minute Voltage : 12 VDC Amp draw : 4.3 @ 12V	460300 Quick-change mount for pipe or surface mount 460310 Quick-change mount with tilt feature for surface mount Replacement parts : 460500-02 Amber dome 439238 Bulb 460510 Rotator drive band 460520 Insert for quick-change base

NUMÉROS NUMBERS	DESCRIPTION
460672	Lampe halogène rotative Sentinel flexible ambre Flexible Sentinel halogen beacon amber



DA2200-38



DA2200-36HD
DA2200-38HD



DA2200-36SD
DA2200-38SD
DA2200-39SD




CLC838




Feux de changement de direction à deux lentilles Boîtier en plastique antichoc, avec lentille à fixation rapide de 1/2 pouce de diamètre, tige creuse en acier plaquée à montage vertical. Une lentille rouge et une ambre : 706139 ampoule à contact simple no. 1156 606139 706140 ampoule à contact double no. 1157 Pièces de rechange : 731817 lentille en acrylique rouge 631817 731818 lentille en acrylique ambre 631818	Feux de changement de direction à deux lentilles Boîtier moulé sous pression, tige creuse en acier de 1/2 pouce de diamètre, montage vertical. Fini émail noir : Ampoule à contact simple no. 1156 706071 une lentille rouge et une ambre 706235 deux lentilles ambres Ampoule à contact double no. 1157 706284 deux lentilles ambres 706072 une lentille rouge et une ambre
---	---

NUMÉROS NUMBERS	DESCRIPTION
706071	Feu de changement de direction à deux lentilles 1 rouge et 1 ambre. Contact simple no. 1156 <i>Double face directional signal lamps. One red and one amber lens simple contact bulb no. 1156</i>
706072	Feu de changement de direction à deux lentilles 1 rouge et 1 ambre. Contact double no. 1157 <i>Double face directional signal lamps. One red and one amber lens double contact bulb no. 1157</i>
CLC838	Même que 706072 mais fini chrome <i>Same as 706072 but chromium finish</i>
731790	Lentille rouge en acrylique <i>Red acrylic lens, 3-screw mount</i>
731791	Lentille ambre en acrylique <i>Amber acrylic lens, 3-screw mount</i>
731817	Lentille rouge en acrylique <i>Red acrylic lens, snap-on</i>
731818	Lentille ambre en acrylique <i>Amber acrylic lens, snap-on</i>
706219	Feu d'avertissement 2 lentilles jaunes <i>Double face warning lamp amber</i>
DA2200-102	Ampoule 12 volts (1156) <i>Bulb 12 volts (1156)</i>
DA2200-104	Ampoule 12 volts (1157) <i>Bulb 12 volts (1157)</i>
DA2200-36	Clignotant 12 volts, 2 bornes / Automotive flashers 12 volts, 2 pin
DA2200-38	Clignotant 12 volts, 3 bornes / Automotive flashers 12 volts, 3 pin
DA2200-36HD	Clignotant 12 volts, 2 bornes H.D. / Heavy duty flasher 12 volts, 2 pin
DA2200-38HD	Clignotant 12 volts, 3 bornes H.D. / Heavy duty flasher 12 volts, 3 pin
DA2200-36SD	Clignotant 12 volts, 2 bornes, service intensif <i>Super duty flasher 12 volts, 2 pin</i>
DA2200-38SD	Clignotant 12 volts, 3 bornes, service intensif <i>Super duty flasher 12 volts, 3 pin</i>
DA2200-39SD	Clignotant 24 volts, 3 bornes, service intensif <i>Super duty flasher 24 volts, 3 pin</i>

Lampe "Body" en caoutchouc / *Rubber lamp*

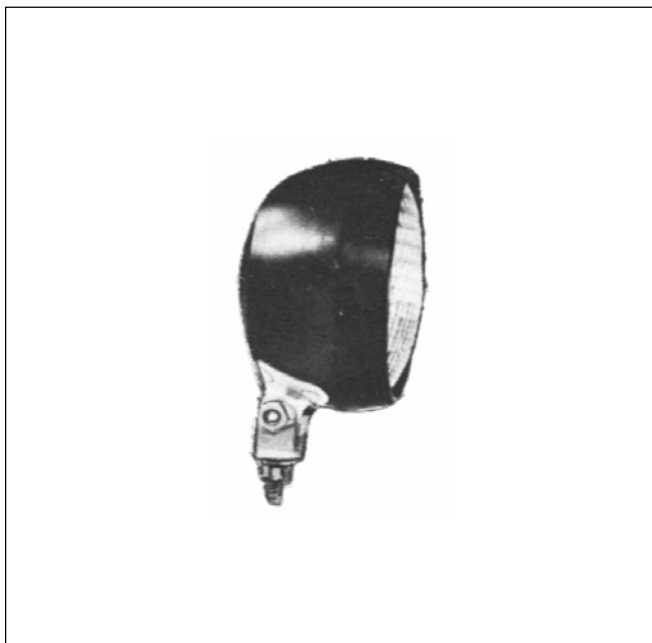


NUMÉROS NUMBERS	REPLACE REPLACE	DESCRIPTION
DA2200-42	505-12 (L505-12V)	Lampe 12 volts, diamètre 5", épaisseur 3", complète avec <i>sealed beam</i> L4411 <i>Lamp with sealed beam, 12 volts, diameter 5"</i>

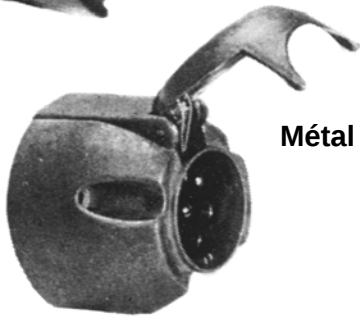Fiches à 7 goupilles / 7 pin plugs**Femelle / female****Plastique / plastic****Métal / metal****Mâle / male****Plastique / plastic****Métal / metal**

NUMÉROS NUMBERS	DESCRIPTION
DA2500-101	Prise électrique femelle (en plastique) <i>Female electric plug (plastic)</i>
DA2500-201	Prise électrique mâle (en plastique) <i>Male electric plug (plastic)</i>
DA2500-100	Prise électrique femelle (en métal) <i>Female electric plug (metal)</i>
DA2500-200	Prise électrique mâle (en métal) <i>Male electric plug (metal)</i>
DA2510-00	Câble électrique 7 conducteurs <i>7 core elect cable (6 strands : 12.75 Amps, 1 strand : 21.75 Amps)</i>

Commutateurs / Switches

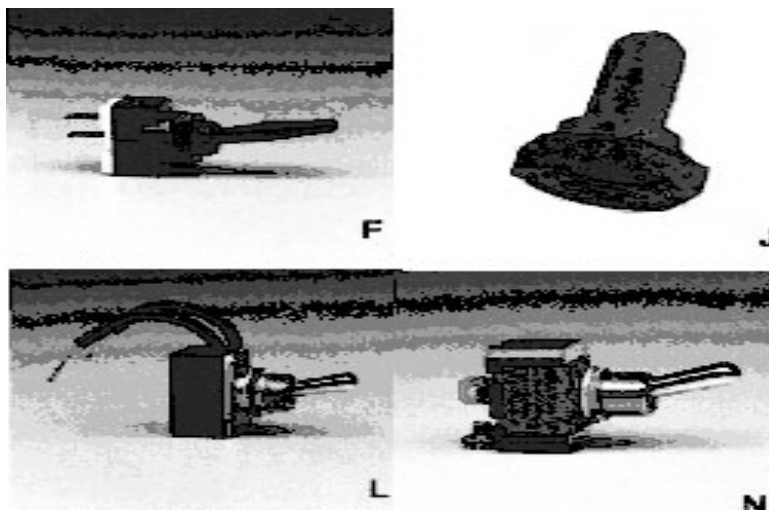

All switches rated 16 amps at 12 VDC unless otherwise noted.

NUMÉROS NUMBERS	REF	DESCRIPTION
210620 (34-219)	F	Commutateur à levier long 2 positions <i>Toggle switch, unlit 2 positions, long lever type</i>
25-370	J	Protecteur de caoutchouc avec 15/32" - 32 filets <i>Toggle rubber boot with 15/32"-32 thread</i>
210631 (34-513)	L	Commutateur à levier avec 2 fils 6" pour trou 1/2" (6 amps) utiliser <i>Toggle switch, supplied with 2x 6" leads, fits in 1/2" diameter hole</i>
210633 (34-212)	N	Commutateur à levier chrome 35A (2 positions) <i>Chrome on metal toggle switch, rated 35 amps (2 positions)</i>

Commutateur à levier long / Reversing toggle switch


Function			Number of terminals	Handle type
Up position	Center position	Down position		
Mom. On	Off	Mom. On	4	Long

Double pole - Double throw

Pour lance-balles M.F. N.H. etc.

Voir dessin au verso / See drawing on reverse side

NUMÉROS NUMBERS	DESCRIPTION
DA2200-330	Commutateur à levier long (remplace M.F. 153641M1) <i>Reversing toggle switch (replace M.F. 153641M1)</i>

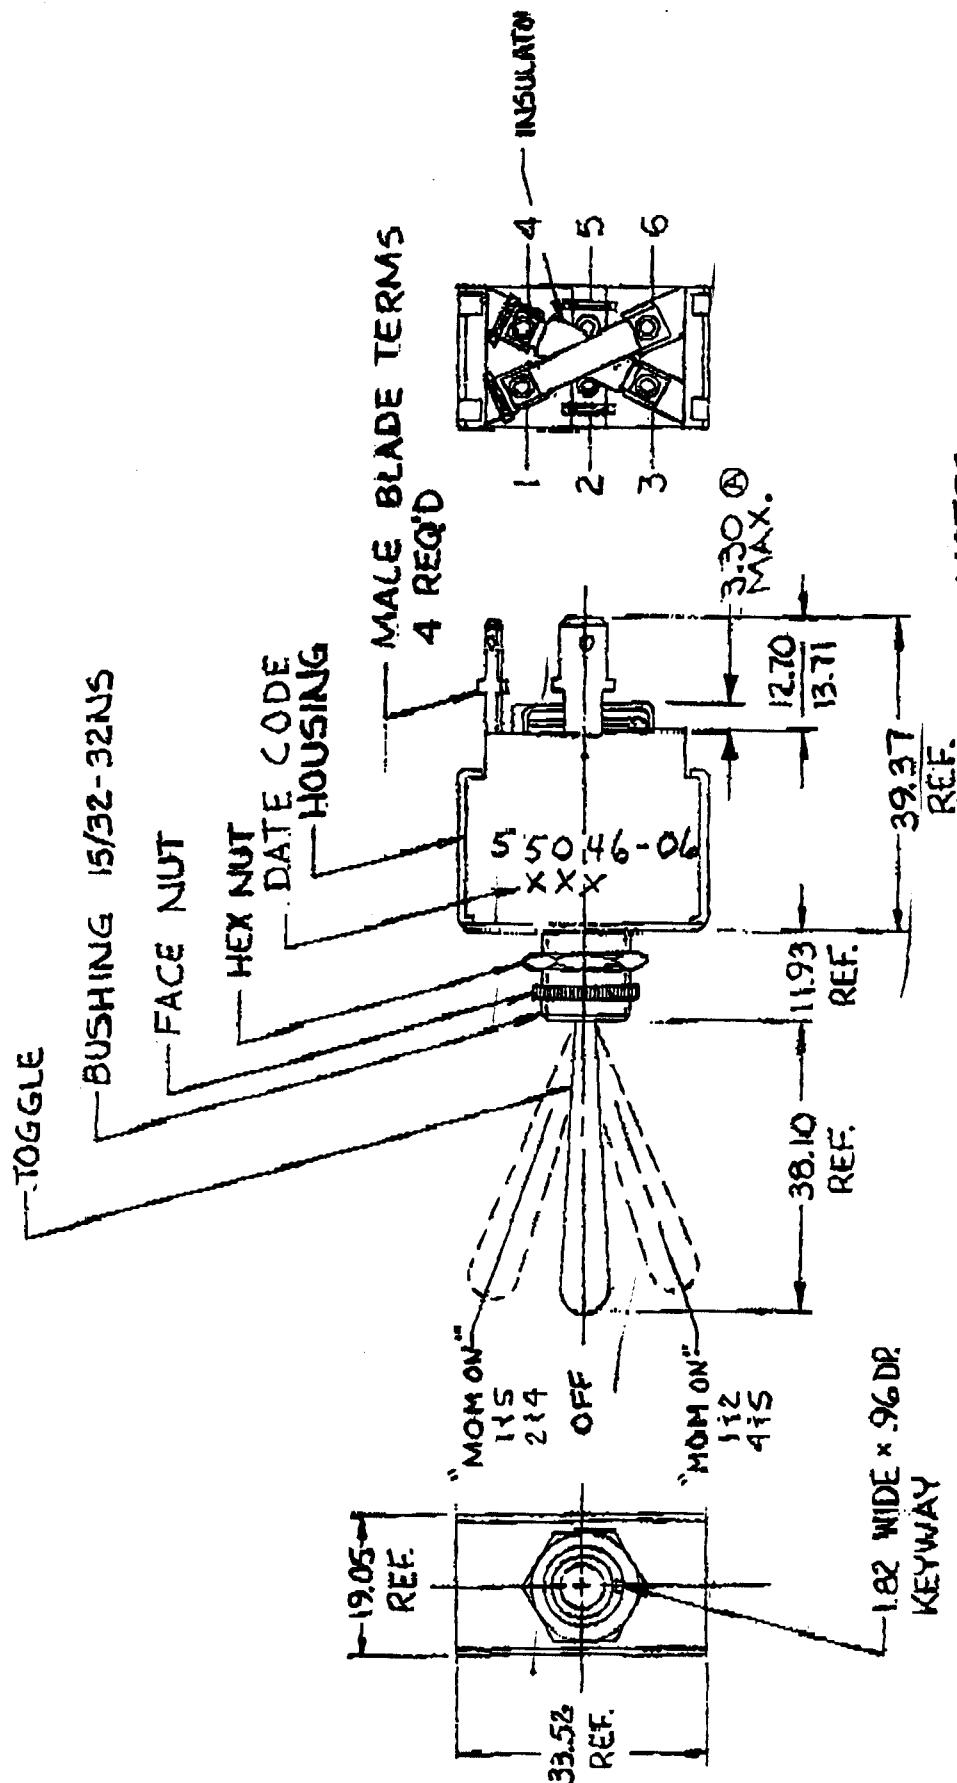

NOTES:



1. ALL STEEL PARTS PLATED
2. 25 AMPS @ 12 V.D.C.
3. O-RING SEALED.

Commutateur reversing toggle switch

50 AMPS

6-24 Volt Systems

Pollak Toggle Switches designed for your most Heavy-Duty applications. Oversized internal copper contacts will carry up to 50 AMP current loads. Provides the longest possible service life. (Note: Quick-Connect Blade terminals will carry 30 AMPS.)

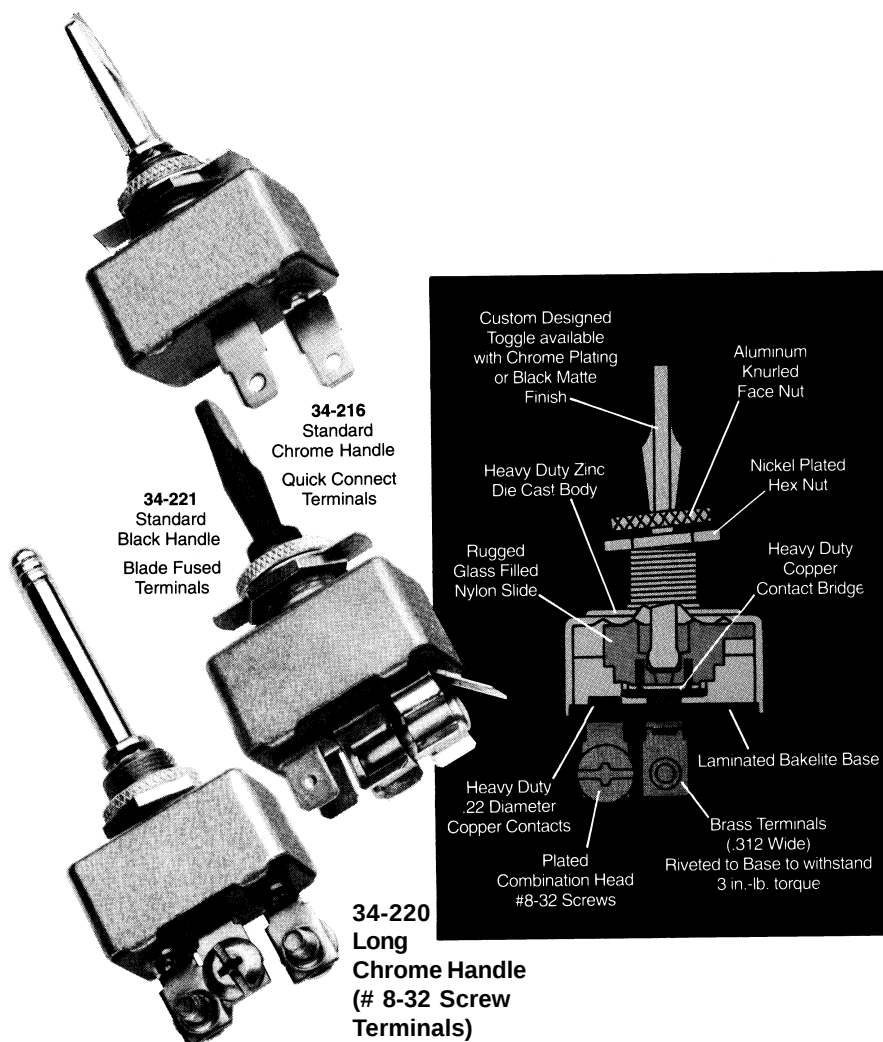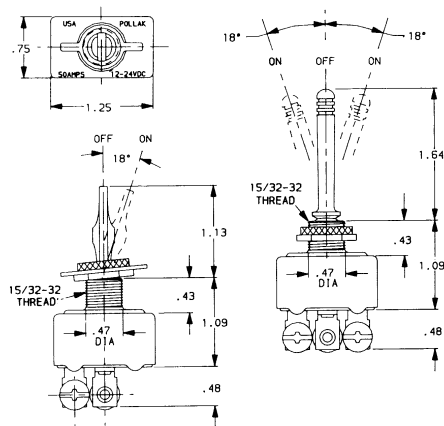

Número Number	Position Circuitry	Terminal Type Terminal Type	Poignée Handle	DC Volts Amp	
S.P.S.T (Simple pôle - Single pole single throw)					
34-212	On - Off	2 vis (2 Screw)	Std 1" - chrome	12	50
34-213	On - Off	2 vis (2 Screw)	Std 1.5" - chrome	12	50
34-216	On - Off	2 tiges (2 Blades)	Std 1" - chrome	12	30
34-217	On - Off	2 Fusibles 30 amp (2 Fuses)	Std 1" - chrome	12	30
34-219	On - Off	2 vis (2 Screw)	Std 1" - noir - black	12	50
34-221	On - Off	2 Fusibles 30 amp (2 Fuses)	Std1" - noir - black	12	30
S.P.D.T (Simple pôle - Single pole double throw)					
34-218	On - Off - On	3 vis (3 screw)	Std 1" - chrome	12	50
34-222	On - Off - On	3 vis (3 screw)	Std 1" - noir - black	12	50
34-215	Mom On - Off - Mom On	3 vis (3 screw)	Std 1" - chrome	12	50
34-220	Mom On - Off- Mom On	3 vis (3 screw)	Long 1.5" - chrome	12	50

Pulsator ® 451 PLUS



The pulsator ® 451 Plus has been updated for improved performance. The Pulsator 451 Plus features a new state-of-the-art, 8-joule, power supply for improved light output and warning effectiveness. This low-profile strobe combines advanced dome optics with a high-performance power supply to produce a brilliant flash that meets SAE Class 2 requirements.

Pulsator 451 Plus strobes are exceptionally durable. The power supply is moisture and vibration resistant and protected against reverse polarity, voltage spikes and RFI. The patented base design and O-ring gasket combine to seal out moisture and contaminants. All models feature modular construction that provides quick access to internal components. The impact-resistant, polycarbonate, dome and base provide added durability in heavy-duty applications.

Heavy-duty models feature a gel-filled base that completely encases the power supply for extra protection against vibration and moisture. The encased power supply allows superior performance in extreme high-vibration environments.

Pulsator 551 Plus models are available in 8-joule (double & quad-flash), 12-48 VDC versions and 115 Volts (5-joule/single & double-flash) AC versions. All models use a helical strobe tube that is easily replaceable. All models include the necessary mounting hardware.

Options :

200069	Bottom plate
210890	Magnetic mount kit
210891	Self-adhesive mounting kit
210892	Suction cup kit
210893	1/2" pipe mount
210894	3/4" pipe mount
210895	1" pipe mount
210876	Amber dome with black top disc
205009	Black top disc
210387	Wiring kit, one strobe
210376	Wiring kit, two strobes

Pièces de remplacement / Replacement parts


2005082A-23-95	12-48VDC power supply, double flash
2005082A-02-95	12-48 VDC power supply, quad flash
439411	Flash tube
211456	115 VAC power supply
208567	Amber dome

Specifications :

Dimensions (dia. x h.):	6.5 in x 4.0 in (165 mm x 102 mm)
Flash rate :	80/min (double) 75/min (quad) 70/min (AC model)
Voltage :	12-48 VDC 115 VAC
Amp draw :	0.9 @ 12V to 0.25 @ 48V 0.1 @ 115V
Joules:	8J (double quad) 5J (AC models)
Output Power:	10.7W (double) 10W (quad) 5.8W (AC model)
Ship weight:	1.3 lbs (0.6 kg) 1.6 lbs (0.2 kg) (Heavy duty)

NUMÉROS NUMBERS	DESCRIPTION
211823	Feu stroboscopique ambre profile bas usage intensif 8J, heavy duty double flash 12-48 VDC Low profile heavy duty strobe light amber double flash 12-48 VDC

MODERATE DUTY



35-300

2 Positions OFF-ON 25 Amp at 6V.
15 Amp at 12V. Mounting Stem 5/8" long.
7/16" Dia. Ivory plastic knob.



34-571

On-Off S.P.S.T. 2 Positions / 2 screw terminals

34-571Q

On-Off S.P.S.T. 2 Positions / 2 blade terminals

34-572

On-On S.P.D.T. 2 Positions / 3 screw terminals.



34-572Q

On-On S.P.D.T. 2 Positions / 3 blade terminals.

EXTRA HEAVY DUTY

35-306

6-28 Volts - 75 amp. D.C.
2 Positions S.P.S.T. Off-on
Heavy duty die-cast body,
chrome plated. Knob cooper terminals,
mounting stem 5/8"
long, 15/32" dia.

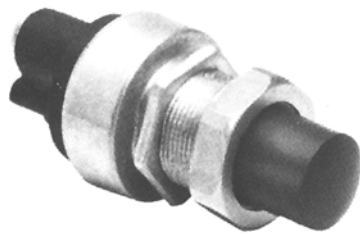

24-359

60 Amps at 12V, 40 amps at 24V.
Silver contacts. Flush terminal screws
in molded insulator. Housing rolled
over insulator to seal out dust and
moisture. Hex back nut, bright
polished face nut and black molded
plunger. Mounting stem 5/8" long, 5/8"
dia thread. Overall length 1-13/16"
housing dia 15/16".

MOMENTARY START




24-360

60 Amps at 12V, 40 amps at 24V,
weather and dustproof.
Same as # 24-359 except with #
25-358 cap and face nut, to seal
out weather and dust.

25-372

Protection collar
safety bezel with 5/8"-
32 thread may be used
on # 24-259, #52-611,
#33-200 and on other
momentary switches with this
mounting stem dimension.

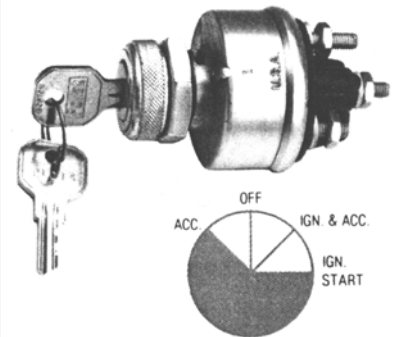

31-103


4 Positions - two keys
supplied. Terminal nuts,
lock washers, hex back
nut, knurled face nut
supplied, die cast housing.
Fits panels with
3/4" hole, bushing 3/4" long.

Automatic Reset Universal - Meets SAE J553


(Terminal hardware included)

Operating temperature - 10°F to 150°F

Storage temperature - 20°F to 200°F

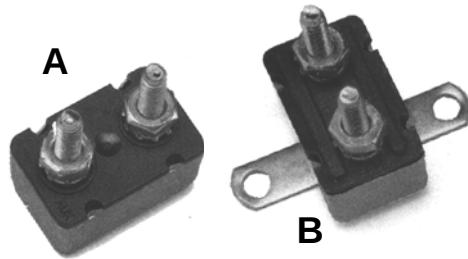

A




B

**90°
Mounting
Bracket**

A	
Less Mounting	Ampere
Part No.	Rating
54-108	8
54-115	15
54-120	20
54-125	25
54-130	30
54-140	40
54-150	50
With 90° Mounting Bracket	Ampere
Part No.	Rating
54-215	15
54-220	20
54-225	25
54-230	30
54-240	40
54-250	50
Straight Mounting Bracket	Ampere
Part No.	Rating
54-515	15
54-520	20
54-525	25
54-530	30
54-540	40

Commutateur / Switch

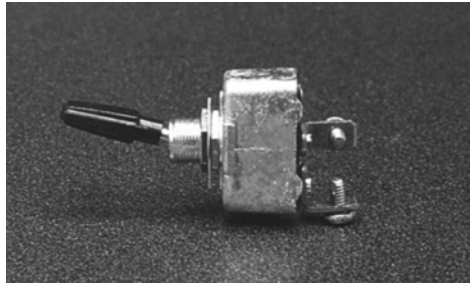


S.P.S.T. two positions off / on. Two heavy brass screw terminals. 11/16" (17 mm) long black plastic handle. Nickel-plated off / on indicator. Die-cast housing, copper contacts and contactors. Rating : 50 amps at 6-24 VDC. Mounting stem 7/16" (11 mm) long, 15/32" (12 mm) diameter.

765012

Remplacé par **SW5038**

Remote Reset Snap-Ins




Barrel

New 12 volt remote reset circuit breaker. Replaces glass style fuses in existing fuse blocks. Opens automatically on overload. Remains open for protection until trouble is corrected.

Part No.	Ampere Rating
54-410	10
54-415	15
54-420	20
54-430	30
54-440	40

Blade Terminals








Blade type is replacement for GM fuse application. Offers similar protection as 54-400 series.

Heavy Duty replacement for ATO and ATC blade type fuses. Special "snap off" feature provides three lengths from .300 to .750 long.

Blade Type	Ampere Rating
Part No.	Rating
54-710	10
54-715	15
54-720	20
54-725	25
54-730	30

ILLUSTRATIONS	NUMÉROS NUMBERS	REPLACE REPLACE	DESCRIPTION
	DA2200-300	2124	Interrupteur pour lampe 6 ou 12 volts, complète avec fusible 20 ampères (était L5067) <i>Switch for lamp 6 or 12 volts, complete with 20 amp. fuse</i>
	DA2200-400	20 AMP UFH9142BP FH14	Porte-fusible incluant étui pour fusible 20 ampères et un bout de fil. Pour installation sur 1 ligne <i>Fuse holder including 20 amp. fuse and a lenght of wire</i>
	DA2200-404		Porte-fusible imperméable " HD" pour fusible 30 ampères et fil (12GA) <i>Fuse holder water proof for 30 amp fuse and wire 12 ga</i>
	DA2200-406		Porte-fusible ATO, CAL.16 sans fusible <i>ATO fuse holder 16 GA without fuse</i>
	DA2200-401	FH12	Porte-fusible H.D. incluant étui pour fusible 30 ampères et un bout de fil (12 GA). Pour installation sur 1 ligne <i>Fuse holder including 30 amp. fuse and a lenght of wire (12 GA)</i>
	DA2200-403	FH12A	Porte-fusible en ligne "ATO/ATC" pour usage intensif avec fusible de 30A, cond CAL. 12,2 <i>H.D. fuse holder including 30A. fuse (in line "ATO/ATC")</i>
	DA2200-405		Porte-fusible "ATO" pour fusible 20 ampères et fil (14 ga) <i>Fuse holder ATO for 20 amp fuse and wire (14 ga)</i>
	733003		Spirale de raccord contact simple, longueur 7" <i>Pigtail single contact, lenght 7"</i>
	733009		Spirale de raccord contact double universel <i>Pigtail double contact universal</i>
	764537		Spirale de raccord contact simple <i>Pigtail single contact ass</i>
	ATO3 ATO5 ATO7.5 ATO10 ATO15 ATO20 ATO25 ATO30		Fusible 3 ampères / <i>Fuse 3 amp.</i> Fusible 5 ampères / <i>Fuse 5 amp.</i> Fusible 7.5 ampères / <i>Fuse 7.5 amp.</i> Fusible 10 ampères / <i>Fuse 10 amp.</i> Fusible 15 ampères / <i>Fuse 15 amp.</i> Fusible 20 ampères / <i>Fuse 20 amp.</i> Fusible 25 ampères / <i>Fuse 25 amp.</i> Fusible 30 ampères / <i>Fuse 30 amp.</i>
Style européen <i>European type porcelain GBC (25 mm x 6 mm)</i>	GBC5 GBC8 GBC16 GBC25		Fusible 5 ampères / <i>Fuse 5 amp.</i> Fusible 8 ampères / <i>Fuse 8 amp.</i> Fusible 16 ampères / <i>Fuse 16 amp.</i> Fusible 25 ampères / <i>Fuse 25 amp.</i>

Sealed beams pour tracteurs




NUMÉROS NUMBERS	REPLACE REPLACE	DESCRIPTION
DA2020-200	L4411	TRACTEURS ALLIS-CHALMERS / ALLIS-CHALMERS TRACTORS
DA2020-210	AC,230232	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
DA2020-222	L4511	Tracteurs D10, D12, D14, D21, 170, 180
DA2020-230	AC,232921	Sealed beam 6 volts, 4-1/2" de diamètre, type 1
	L4419	Tracteurs D10, D12
	AC,230252	Sealed beam 12 volts, 5-3/4" de diamètre, type 2
	L4460X	Tracteurs D10, D12, D15, D17, 190
	AC,268648	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
		3 Connecteurs "dimmer"
DA2020-200	L4411	TRACTEURS CASE / CASE TRACTORS
DA2020-212	Case, A24572	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
	L4406	
	Case, A42294	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
DA2020-200	L4411	TRACTEURS DAVID-BROWN / DAVID-BROWN TRACTORS
DA2020-262	K962145	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
	L4440X	Tracteurs 770, 880, 990, 1200 jusqu'en 1962
	K962146	Sealed beam 12 volts, 3 connecteurs "dimmer", type 3, numéro G.E. 4440X
DA2020-210	L4511	TRACTEURS JOHN-DEERE / JOHN-DEERE TRACTORS
DA2020-200	J-D, A-F3893R	Sealed beam 6 volts, 4-1/2" de diamètre, type 1
DA2020-212	L4411	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
DA2020-230	J-D, A-F3892R	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
	L4406	
	J-D, AR21059	Sealed beam 12 volts, 4-1/2" de diamètre, 3 connecteurs "dimmer"
	L4460X	
	J-D, AR48723	
DA2020-220	L4019	TRACTEURS FORD / FORD TRACTORS
DA2020-222	Ford 310061	Sealed beam 6 volts, 5-3/4" de diamètre, type 2
DA2020-210	L4419	Sealed beam 12 volts, 5-3/4" de diamètre, type 2
DA2020-200	Ford 310062	Sealed beam 6 volts, 4-1/2" de diamètre, type 1
DA2020-230	L4511	Sealed beam 12 volts, 4-1/2" de diamètre, type 1
DA2020-262	Ford 312554	
	L4411	Sealed beam 12 volts, 4-1/2" de diamètre, 3 connecteurs "dimmer"
	Ford 312555	Ford 8000, 9000 et autres
	L4460X	Sealed beam 12 volts pour Ford venant de l'Angleterre à compter de 1965,
	D3NN-13N007A	Type 3, 4-1/2" de diamètre, 3 connecteurs "dimmer", no. GE4440X
	L4440X	
	C5NN-13N007A	
	D6NN-13N00A	

"SEALED BEAMS" POUR TRACTEURS

NOS. DE COMMANDE ORDER NOS.	REPLACE REPLACE	DESCRIPTION
POUR INTERNATIONAL-HARVESTER TRACTORS		
DA2020-220	L4019 371457R91.	"Sealed beam", 6 volts, 5-3/4" dia., type-2.
DA2020-222	L4419 371443R91.	"Sealed beam", 12 volts, 5-3/4" dia., type-2.
DA2020-210	L4511 373661R91.	"Sealed beam", 6 volts, 4-1/2" dia., type-1.
DA2020-200	L4411 373662R91	"Sealed beam", 12 volts, 4-1/2" dia., type-1.
DA2020-262	L4440X 3072947R91	"Sealed beam, 12 volts, 4-1/2" dia., type 3, "dimmer" no. GE4440X.
POUR MASSEY-FERGUSON TRACTORS		
DA2020-220	L4019 1002802M91	"Sealed beam", 6 volts, 5-3/4" dia., type-2 Tracteurs TO-20, TO-30, TO-35
DA2020-222	L4419 1002803M91 1038428M91	"Sealed beam", 12 volts, 5-3/4" dia., type-2 Tracteurs TO-35, 50, 65 et autres
DA2020-200	L4411 1752866M91	"Sealed beam", 12 volts, 4-1/2" dia., type-1 Pour lampes dans les ailes MF150, 154, 1100, 1130
DA2020-212	L4406 505285M91	"Sealed beam", 12 volts, 4-1/2" dia., type-1 MF135 avec lampes sur le côté des ailes.
DA2020-264	L4440X1 535505M1	"Sealed beam", 12 volts. 4-1/2" dia., no. GE 4440X1. Tracteurs MF235, 265, 275, 285
"SEALED BEAM" NUMEROS G-E		
DA2020-200	L4411	"Sealed beam" 12 volts, 4-1/2" dia., type-1
DA2020-210	L4511	"Sealed beam" 6 volts, 4-1/2" dia., type-1
DA2020-212	L4406	"Sealed beam" 12 volts, 4-1/2" dia., type-1
DA2020-220	L4019	"Sealed beam" 6 volts, 5-3/4" dia., type-1
DA2020-222	L4419	"Sealed beam" 12 volts, 5-3/4" dia., type-1
NUMEROS G-E, 3 CONNECTEURS "DIMMER"		
DA2020-230	L4460X	"Sealed beam" 12 volts, 4-1/2" dia., 3 connecteurs " dimmer"
NUMEROS G-E, 100 WATTS, HAUTE INTENSITE		
DA2020-240	L4509	"Sealed beam" 12 volts, 4-1/2" dia., 100 watts Remplace L4411 (DA2020-200) mais éclaire mieux
NUMEROS G-E COMBINES "ROUGE & BLANC"		
"SEALED BEAM" NUMEROS O.E.M.		
DA2020-262	K962146	"Sealed beam" 12 volts, David-Brown (GE4440X)
DA2020-262	C5NN13N007A D6NN13007A	"Sealed beam" 12 volts, Ford de l'Angleterre (GE4440X)
DA2020-262	3072947R91	"Sealed beam" 12 volts, I-H de l'Angleterre (GE4440X)
DA2020-264	535505M1	"Sealed beam" 12 volts, Massey-Ferguson (GE4440X1)

" SEALED BEAMS" HALOGÈNE POUR TRACTEUR - FOR TRACTORS

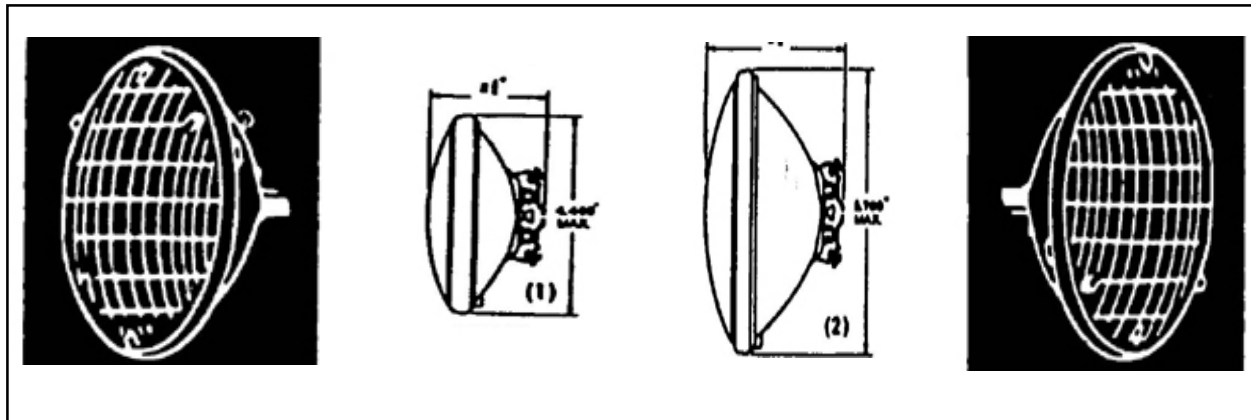

**12 VOLTS "SEALED BEAM BULBS" AVEC
LAMPE HALOGÈNE SPÉCIALE 50 WATTS
3.9 AMPÈRES AVEC 2 TERMINAUX VISÉS.**

**12 VOLTS SEALED BEAM BULBS WITH
SPECIAL INNER HALOGEN BULBS
50 WATTS, 3.9 AMP BULBS WITH 2
SCREWS TERMINALS**





**HALOGÈNE " SEALED BEAM
BULB"**


NUMÉRO NUMBER	DESCRIPTION
H7610	"Sealed Beam" Halogène, 4 -1/2 dia., capacité de 5 200 chandelles, lumière trapézoïdale. Même utilisation que L4411 (DA2020-200). Halogene sealed beam bulb, 4- 1/2 dia., 5 200 candle power. Trapezoidal light pattern. Can be used in place of L4411
H7619	" Sealed Beam" Halogène, 5 -3/4 dia., capacité de 6 000 chandelles, lumière trapézoïdale. Même utilisation que L4419 (DA2020-222). Halogene sealed beam bulb, 5 -3/4 dia., 6 000 candle power. Trapezoidal light pattern. Can be used in place of L4419

Assortiments de Fusibles

Fuse Assortments

Illustrations	Numéros Numbers	Description
           	FAATO100 FAM100 FAS21 FAGBC30 FAGL100	Assortiment de fusibles contient: 100 x ATO type de ATO5 à ATO30 <i>Fuse assortment contents: 100 x ATO type from ATO5 to ATO30.</i> Assortiment de fusibles contient: 100 x Micro type (mini) de AMF3 à AMF15. <i>Fuse assortment contents: 100 x Micro type from AMF3 to AMF15.</i> Assortiment de fusibles contient: 21x Super type (maxi) de ASF20 à ASF60. <i>Fuse assortment contents: 21 x Super type (maxi) from ASF20 to ASF60.</i> Assortiment de fusibles contient: 30 x Porcelaine type GBC de GBC5 à GBC25. <i>Fuse assortment contents: 30 x GBC type from GBC5 to GBC25.</i> Assortiment de fusibles contient: 100 x Verre type de AGC5 à AGC30 & SFE14 à SFE30. <i>Fuse assortment contents: 100 x Glass type from AGC5 to AGC30 and SFE14 to SFE30.</i>

Support de fusibles - *Fuse holders*

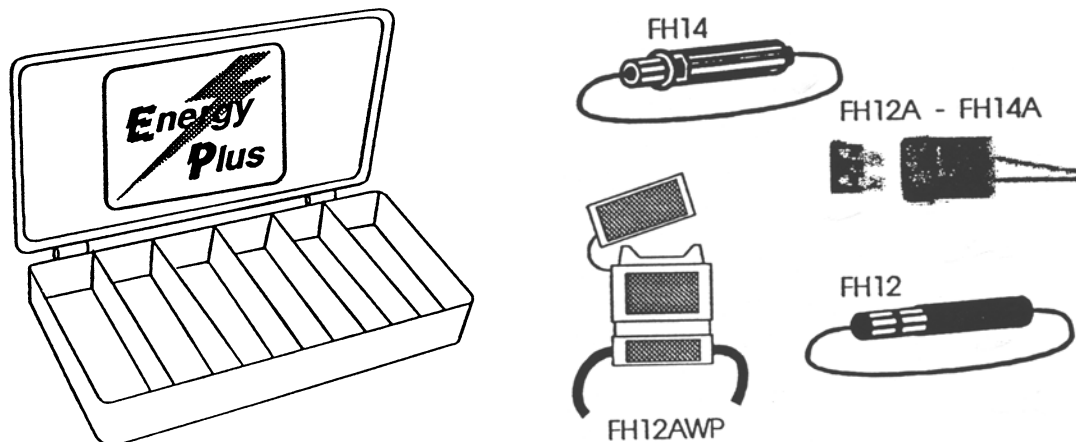

- | | |
|--------------------|--|
| 8 X FH12 | 12 Ga. bottle type in line using glass fuse |
| 6 X FH12A | 12 Ga. plug-in type in line w/cover using ATO fuse |
| 6 X FH12AWP | 12 Ga. plug-in H.D. & waterproof using ATO fuse |
| 8 X FH14 | 14 Ga. twist lock in line using glass fuse |
| 6 X FH14A | 14 Ga. plug-in type in line w/cover using ATO fuse |

34 pcs

FH12 = DA2200-401
FH12A = DA2200-403
FH12AWP = DA2200-404
FH14 = DA2200-400
FH14A = DA2200-405

Numéro Number	Description
FHA34	Ensemble de 34 supports de fusibles dans une boîte. (Fusibles inclus) <i>Fuse holder assortment in a box. (Fuses included)</i>