

MTI
CANADA



STOLL

STOLL Tools



Real powerful
tools.

TOOLS

Helping you to take control.



Home of Quality.

Limitless possibilities!

Load grain, transport bales, remove silage, stack pallets, move tree-trunks and, and, and... and the best way to do all these is with a STOLL front-loader and the suitable tool we provide.

Whatever the task, STOLL has the solution. Tools have to stand up to the toughest demands. That's why, at STOLL, we rely on the best material quality and German Engineering in product development. Extensive practical trials guarantee a long working life for your STOLL tools.

STOLL engineers are always developing innovations to suit the changing times, meeting your requirements and making your life easier. Because your demands are what spur us on.





STOLL original tools stand up to all tests. They are versatile, robust and powerful. With them, you use the entire power of your front-loader.



Tool handling made easy.

Tool attachment –
just a short pit-stop



1 Approach and hook
in the front-loader



2 Roll back the tool – the locking
mechanism will engage automatically



Tool locking with the push of a button, even more comfortable
tool changing without dismounting – using HYDRO-LOCK.



For even quicker hydraulic tube connection, the Tool-Fix for tool
connection is available.



3 Couple the hydraulic connection




3rd/4th control circuit

- Simple operation of hydraulic tools
- The driver does not need an additional control device
- Necessary for work with e.g. silage forks, bale grabs or bale stackers



REAL³

- A genuine 3rd control circuit to control tools independently of the front-loader controls.
- The hydraulic pump in the tractor will supply the tool with oil directly.
- Tool functions can run simultaneously – this makes all work faster and more effective

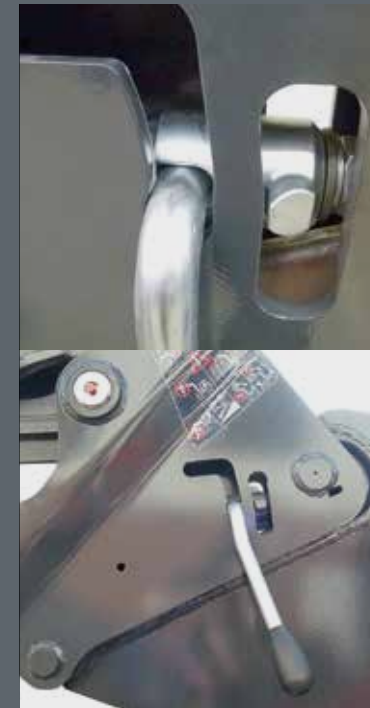

Double Locking

- Standard for FZ 60/60.1 + 80.1
- Optional for FZ 50/50.1
- For heavy work loads

Thanks to our versatile technologies, handling your tools is child's play. Because your time is worth gold.

A man with short brown hair and a light beard, wearing a white shirt, is shown in profile, smiling and looking down at a stalk of wheat. The background is a bright, sunny field of wheat under a clear blue sky. The text "GENERATIONS" is written in red, and "down the line." is written in black, both in a sans-serif font, overlaid on the lower part of the image.

GENERATIONS
down the line.





All buckets in full action!

A tough performer for your Profiline: the perfect bucket for every demand, versatile in use and strong in construction:

- High level of robustness, low wear and low weight thanks to the use of high quality steel.
- Easy work even with sticky products – the conical shape, which opens up towards the cutting edge, makes this possible.
- The cutting edge can withstand the toughest stress – day after day, year after year.



Cutting edge hardness
BRINELL 500



Cutting edge hardness
BRINELL 500

ROBUST U – for universal, light to moderate use

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m ³	Cutting edge Brinell 500 HB	Weight in kg		
3428170	1,15	0,47	0,41	110x16	130		
3428180	1,30	0,51	0,44	110x16	132		
3428190	1,50	0,60	0,52	150x16	161		
3428200	1,70	0,68	0,59	150x16	176		
3428210	1,90	0,76	0,66	150x16	211		
3428220	2,05	0,82	0,71	150x16	225		
3428230	2,20	0,89	0,77	150x16	269		
3461720	2,40	0,94	0,82	150x20	310		

ROBUST M – specifically for the loading of loose bulk materials with low weight

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m ³	CUTTING EDGE Brinell 500 HB	Weight in kg		
3428330	2,05	1,45	1,13	150 x 16	320		
3429920	2,20	1,56	1,22	150 x 16	384		
3429930	2,40	1,70	1,33	200 x 20	432		
3429940	2,60	1,86	1,45	200 x 20	462		

ROBUST S – for working with heavy and sticky material, like wet earth or snow



Cutting edge hardness
BRINELL 500

Order no.	Width in m	Volume heaped in m³	Volume level heap in m³	CUTTING EDGE Brinell 500 HB	Weight in kg		
3428260	1,50	0,60	0,52	150 x 16	172		
3428270	1,70	0,68	0,59	150 x 16	190		
3428280	1,90	0,74	0,64	150 x 20	242		
3428290	2,05	0,81	0,70	150 x 20	258		
3428300	2,20	0,87	0,76	150 x 20	308		
3428310	2,40	0,94	0,82	200 x 20	351		
3459310	2,60	1,01	0,88	200 x 20	376		

ROBUST T – with teeth for earth moving, demolition and digging



Cutting edge hardness
BRINELL 500

Order no.	Width in m	Volume heaped in m³	Volume level heap in m³	CUTTING EDGE Brinell 500 HB	Weight in kg	Tines	
3436990	1,50	0,60	0,52	150 x 16	177	5	
3437000	1,70	0,68	0,59	150 x 16	196	6	
3437010	1,90	0,74	0,64	150 x 20	249	6	
3437020	2,05	0,81	0,70	150 x 20	266	7	
3437030	2,20	0,87	0,76	150 x 20	316	7	
3437040	2,40	0,94	0,82	200 x 20	359	8	
3459300	2,60	1,01	0,88	200 x 20	385	8	

Combined levelling and grabbing bucket (4-in-1) – four functions at once: shovelling, grabbing, levelling, rapid emptying



Order no.	Width in m	Volume heaped in m³	Weight in kg				
3492030	1,70	0,60	350				
3492040	1,90	0,67	368				
3492050	2,10	0,77	400				

3rd control circuit required

Gripping legends and digging marvels. Our STOLL buckets get to grips with power, hand in hand with our ProfiLine.



Grab it!

Whether in animal husbandry or biogas plants – silage is everywhere.

- For all silage-related processes there is a suitable Profiline tool from STOLL.
- Effective and comfortable – each tool can be easily and precisely controlled.
- Our tip: the large grapple buckets have a huge volume. In biogas plants you can easily keep up with wheel loaders.

Multifunctional compact marvels packing all sorts of power. Our Profiline tools are every farmer's best partner. Grab one yourself!

Multi-purpose bucket HD



Order no.	Width in m	Volumen in m³	Opening width in mm	Weight in kg			
3668320	1,50	0,62	1.320	341			
3668330	1,70	0,71	1.320	372			
3668340	2,05	0,85	1.320	429			
3668350	2,20	0,92	1.320	458			
3668360	2,50	1,00	1.320	498			
Side plate (details per set)							
3659430							
Lateral teeth (details per set)							
3659420							
3rd control circuit required							

Bucket with grapple – the universal implement for silage handling: thanks to the closed bottom, also wet and/or loose material can be handled



Order no.	Width in m	Volumen in m³	Opening width in mm	Weight in kg			
3547610	1,50	0,59	1.290	292			
3547620	1,70	0,67	1.290	314			
3547630	2,05	0,82	1.290	373			
3547650	2,20	0,88	1.290	423			
3547640	2,40*	0,97	1.290	446			
Side panel optional (details per unit)							
3548350							
3rd control circuit required							

* While stocks last.



Fork with grapple – perfect to transport silage or manure

Order no.	Width in m	Volume heaped in m³	Tines bottom	Opening width in mm	Weight in kg		
3429090	1,30	0,54	7	1.300	226		
3429100	1,50	0,63	8	1.300	249		
3429110	1,70	0,71	9	1.300	268		
3429120	2,05	0,87	11	1.300	304		
3430650	2,40	1,02	13	1.300	355		
3rd control circuit required							




Silage cutters Profi-Cut – for taking portions of silage; the serrated edge ensures a straight cut

Order no.	Width in m	Volume heaped in m³	Depth in mm	Opening width in mm	Number of tines	Weight in kg	
3334760	1,28	0,87	790	856	10	500	
2449320	1,52	1,05	790	856	13	530	
3306680	1,88	1,28	790	856	16	730	
Shove off device							
3521560							
3rd control circuit required With width 1,88 two shove off devices required.							




Round bale cutter – to cut silage bales, without the driver getting off and without an additional implement

Order no.	Height (closed) in m	Height (open) in m	Width/length in mm	Maximum bale width in mm	Maximum bale Ø in m	Maximum bale weight in kg	
3591570	0,85	1,75	1,82/1,10	1,40	1,55	1.400	
3rd control circuit required							



Manure fork – for handling manure.
The arrangement of the tines prevents load loss

Order no.	Width in m	Tine length in mm	Number of tines	Weight in kg			
3364760	1,25	810	7	125			
3364690	1,50	810	8	145			
3364520	1,75	810	10	165			
Lateral tine (details per set)							
3534780							
3611820	2,00	810	11	243			
3611830	2,00	1.100	11	264			
3611930	2,25	1.100	12	288			
3660460	2,50	1.100	14	318			
Lateral tine (details per set)							
3534780							
Loading grill							
3599680	2,00			40			



Even wheel loaders are quaking in their boots.
Pros for the ProfiLine.



Bucket with grab – suitable for all kinds of silage:
ideal for direct loading and transportation



NEW

Order no.	Width in m	Opening width in mm	Volume in m ³	Weight in kg	
3687650	1,60	1.480	0,88	512	
3687660	1,80	1.480	1,00	549	
3687670	2,00	1.480	1,10	601	
3687680	2,20	1.480	1,21	641	
3687690	2,50	1.480	1,38	753	
Corn tine optional (details per set)					
3635370					
3rd control circuit required					

Disposer bucket – multi-functional implement,
especially for bulky goods



Order no.	Width in m	Opening width in mm	Volume in m ³	Weight in kg	
3591550	1,80	1.480	1,00	557	
3632970	2,00	1.480	1,10	605	
3591560	2,20	1.480	1,21	636	
3602920	2,50	1.480	1,38	762	
Side plate optional (details per set)					
3635380					
3rd control circuit required					

To the Bales get set, go!

Every summer is high season for bales – prepare yourselves in good time: with STOLL bale tools.

Whether round or square bales, with wrap or without: At STOLL you can always find the right tools.



Bale handlers by STOLL are the perfect choice for every size of bale.

Wrapped bale handler – perfectly suitable for wrapped round bales: there are no sharp edges that can damage the foil

Order no.	Weight in kg						
2364610	225						
For round bales Ø from 1,00 m to 1,80 m / for square bales Ø 1,60 m 3rd control circuit required							

Wrapped bale handler-Pro H – for the safe handling of round and square wrapped bales

Order no.	Weight in kg						
3395020	305						
Largest / smallest opening: 2,05 m / 0,65 m Effective depth: 1,20 m Transport width: 1,35 m for square and round wrapped bales 3rd control circuit required							

Bale carrier rear – for the transport of round and wrapped bales in the rear

Order no.	Weight in kg						
3336750	115						
Tractor rear three-point linkage or device triangle Gripping area from 0,94 m to 1,34 m in 5 cm intervals / Lift arm boom length 1,28 m							



Bale carrier rear H – ideal for transporting round bales

Order no.	Weight in kg						
3380410	105						
For round bales Gripping area from 0,82 m to 1,22 m / Beam length 1,28 m / Pipe diameter 0,16 m							



Maxi bale claw H – simultaneously grab, lift and load up to two bales

Order no.	Weight in kg						
2449950	150						
For round and square bales 3rd control circuit required							



Roll-type bale fork – fits all bale types

Order no.	Weight in kg						
3573240	245						
For round and square wrapped bales / Gripping range from 0,60 m to 1,85 m 3rd control circuit required							



Bale fork lift H – the built-in lifting device brings a height gain of up to 1,40 m

Order no.	Weight in kg						
1339660	260						
For round and square bales / lifting height gain of 1,40 m to the normal height 3rd control circuit required							

Anyone can pile it on thick, but only a few are true to their word. Our pallet and bale forks are real experts in their field.



Bale spike H – variable tine placing – so the spike suits all bales

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg				
3378240		1x800 / 1x1.200	92				
3411860		2 x 1.200	95				
Frame							
3385190	1.000		76				
Heavy duty tines (per unit)							
1330130		1.200	9				
Heavy duty tines (per unit)							
0476240		800	5				
For round and square bales Additional tines can be retrofitted							


Big bale fork HS – the distance between the tines can be easily changed. Pallet fork tines can also be mounted onto these frames

Order no.	Tine in mm	Weight in kg					
3684190	1.200	140					
3684200	1.200 foldable	175					
Frame HS							
3654340	–	110					
Frame HS (details per unit)							
2400050	1.200	20					
3331520	1.200 foldable	23					
For round and square bales							

Big bale fork – for safe transport of multiple stacked bales


Order no.	Tine in mm	Weight in kg	Payload in kg				
3611920	1.200 foldable	147	1.000				
For round and square bales. For safe empty driving on public roads, the bale tines can be folded upwards.							

Every- thing alright.

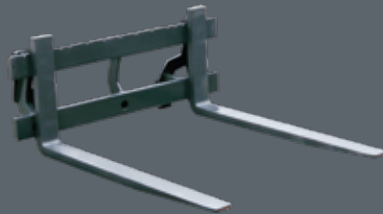

Lifting, loading, stacking – with STOLL pallet forks for your Profiline you will always work precisely:

- These pallet forks are particularly sturdy because STOLL places a high value on robust construction and top-quality materials.
- You can position the tines exactly how you need them for your work. The tines can be moved by hand.
- The largest pallet fork lifts up to 3.5 t and belongs in the top class of front-loader tools.

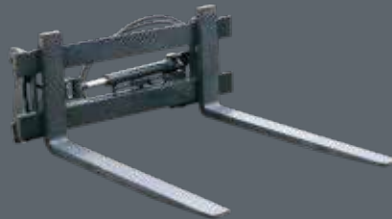

Pallet fork HD – the forks can be moved freely – the driver can also mount bale tines to the frame

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	connection		
3646850	2.500	1.200	196				
3654360	1.600	1.200	166				
3654370	1.600	1.000	158				
Frame HD							
3654340	2.500		94	1.250	ISO 2328		
Pallet tine HD (per unit)							
3570730	1.250	1.200	51		ISO 2A		
3570720	800	1.200	36		ISO 2A		
3570710	800	1.000	32		ISO 2A		
Frame includes 3 bushings for bale tines							

Pallet fork HD with side shift

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	connection		
3614380	2000	1.200	257				
Frame HD							
3666450	2.000		155	1.250	ISO 2328		
Pallet tine HD (per unit)							
3570730	1.250	1.200	51		ISO 2A		
Side shift +/- 145 mm 3rd control circuit required							

Pallet fork HS 1500 – in addition to the pallet fork tines, as many as four bale tines can be mounted on the frame

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	connection		
3430830	1.600	1.000	185				
3434900	1.600	1.200	200				
Frame HS 1500							
3434840	1.600		115	1.500	ISO 2328		
Pallet tine HD (per unit)							
3570710	800	1.000	43		ISO 2A		
3570720	800	1.200	66		ISO 2A		

Lifting-aids.

Heavy lifting – light work

The declared goal of our STOLL engineers is developing tools to make farming more efficient. With reduced manpower and robust technology you can manage your daily tasks much more easily. Your ProfiLine will also feel the benefit.



Bigbag-Lift – especially developed for bulk bags with one or two loops. The implement raises the load 1,5 m above the implement rotation point – so the view is guaranteed to be free

Order no.	Payload in kg	Weight in kg	Lifting height above implement pivot point in mm				
3602900	1.000	115	1.500				



Bag-Lift H – perfect for bulk bags with four loops

Order no.	Payload in kg	Weight in kg	Lifting height above implement pivot point in mm				
2357100	1.000	180	500				

For bulk bags up to 1.000 kg



Loading Hook – for good balance during transport: the load is centered near the front axle

Order no.	Lifting capacity in kg	Weight in kg					
2309670	2.000	16					

The hook is swivel mounted

Woodlands also need STOLL. We give you the best support in forestry operations. Because your woodlands are worth it.

Ideal for Timber and Forestry.

Wood making – STOLL forestry implements ensure effective work.

The log fork H and the log fork are specialists in forestry.



Log fork H with hydraulic top-loading grip – gripping of logs with the top loading grip – so nothing is lost

Order no.	Grip opening in m (clear width)	Weight in kg					
3390260	1,04	235					
3rd control circuit required							



Log fork H – for the transport and bunching of logs

Order no.	Weight in kg						
1317750	150						



Top loading grip – the ideal complement to the pallet fork, to retrieve or load logs

Order no.	Opening width in mm	Weight in kg					
3548990	1.385	79					
For pallet fork HD and HS 1500 (must be ordered separately) – 3rd control circuit required							

The smart extra.



Set holding tubes – so the load remains intact:
the pipes round off sharp edges.

Order no.	Weight in kg						
3405090	36						
For pallet fork tines 1.000 HS and 1.200 HS							



Safety grill – so nothing slips:
secures the load to the rear

Order no.	Weight in kg						
3570550	23						
For big bale fork HS and pallet fork HD							



14 Deg Adapter – thanks to the improved tilt angle
everything stays inside the bucket

Order no.	Weight in kg						
3522000	12						
To improve the tipping angle (crowd) (set: 2 brackets incl. screws) – fits only for buckets and manure forks							



Three-point-linkage-adapter – for the rear-mounted
hook implements

Order no.	Weight in kg						
3386990	60						
For hook implements in 3 point rear mounting, lifting capacity 1,5 t at the coupling point of the lower linkage							

STOLL thinks globally and liberally. That's why, in our range, you will also find smart special solutions for ProfiLine, if that's what your life requires. STOLL supports you all the time.



Conversion kit to hook implements – for the conversion of hook implements to Euro standard

Order no.	Weight in kg			
1334090	19			
1 Set cpl. connection plates (left + right)				



Hooks and eyes – the individual set for conversion to hook implements

Order no.	Weight in kg			
3320080				
1 Set cpl. connection plates (left + right)				



Implement stand – everything tidy: the ideal storage space for up to four implements

Order no.	Width in m	Height in m	Weight in kg	
3523120	1,22	2,40	150	
Delivery without implements.				



Attachment frame

Attachment frame


Order no.	Weight in kg			
Attachment frame Euro to (MX) - FR				
3331970	44			
Attachment frame Euro to Faucheur				
3551060	44			
Set of hooks for attachment frame Euro-TR				
3603560	14			
Attachment frame Euro to Tenias				
3664360	70			



Euro



Euro + Alö

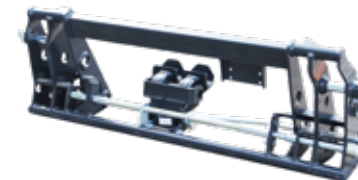

Euro + (MX) - FR



Euro + SMS

Classic all-rounder.

The Solid stands out for its flexible usage possibilities: Everything in the usual top STOLL quality with an exceptional price/performance ratio. Here you will find the extensive tool range that fits the Solid.

- Easy to handle
- Flexible implementation
- Long working life

Pallet fork – pallet loading made easy. Thanks to its sturdy construction, you can pick up to 1.000 kg at a time with the pallet fork. Adjust the spacing of the pallet tines to suit your needs.




Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	connection		
Pallet fork							
3567980	1.000	1.000	113				
Frame							
3567990	1.000	–	59	1.200	ISO 2328		
Pallet tine (per unit)							
3570700	500	1.000	27		ISO 1A		

**The superheroes of tools.
Steeled for every challenge,
these tools stand their ground.
Reliable and powerful.**



Wrapped bale handler – so your wrapped bales remain undamaged. The wrapped bale tongs have no sharp edges and have been developed specifically for the transportation and loading of wrapped bales.


Order no.	Opening width in mm (largest/smallest)	Weight in kg					
3571470	1.400/800	114					
For round bales ø from 0,80 m to 1,40 m, 3rd control circuit required Available from the end of 2019!							

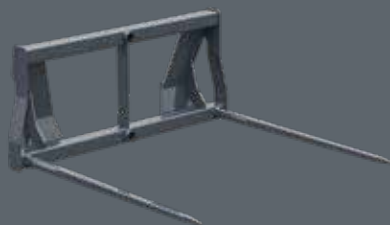

Bale spike – a spike for all bales. Transport round and square bales easily and safely with the bale spike. The tines can be placed in four positions in the frame, depending on the application.

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg				
3611810	700	2x800	68				
3608420	700	2x1.200	76				
Frame							
3608430			58				
Tine							
0476240		800	5				
Tine							
1330130		1.200	9				
The bale spike has been developed for the handling of round and square bales.							

Universal bucket – ideal for light to moderate use. Your loose bulk material can also be easily loaded.

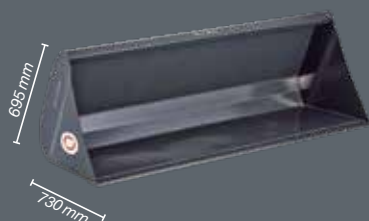

Order no.	Width in m	Volume heaped in m³	Volume level heap in m³	Weight in kg			
3550490	1,40	0,45	0,36	99			
3550500	1,60	0,52	0,41	109			
3550510	1,85	0,61	0,48	131			
3550520	2,10	0,70	0,55	171			



Compact loaders.

Ideal for all tasks – the extensive CompactLine tool range remain impressive in tight situations.

- Shovelling, grabbing or loading – STOLL tools offer the right solution for all tasks. Round about the house and farmyard, forest, garden and landscaping!
- For the driver to have unobstructed sight of the working zone, all tools have a Skid Steer attachment.
- Even the small ones have great power: the light and compact construction of these tools fits perfectly with the CompactLine.

The sandpit's over. Our Compact-Line buckets load, shovel and grab like the big boys.


Bucket – for all loading work



Order no.	Width in m	Height in m	Depth in m	Volume level heap in m³	Volume heaped in m³	Weight in kg	
3616990*	1,22	0,45	0,46	0,15	0,17	70	
3634460**	1,22	0,45	0,46	0,15	0,17	70	
3533440	1,22	0,57	0,60	0,18	0,21	100	
3495570	1,40	0,57	0,60	0,21	0,24	108	
3478580	1,57	0,57	0,60	0,27	0,31	118	
3478590	1,74	0,57	0,60	0,30	0,35	130	

*only for CompactLine FC 150 L / **only for CompactLine FC 150 P + H

Levelling and grabbing bucket (4-in-1) – four functions at once: digging, grabbing, levelling, rapid emptying



Order no.	Width in m	Volume heaped in m³	Weight in kg				
3490770	1,40	0,19	145				
3490780	1,57	0,22	160				

3rd control circuit required


Bucket with grapple – the universal gripper, because thanks to the closed bottom, wet and/or loose material can also be transported



Order no.	Width in m	Height in m	Depth in m	Opening in mm	Weight in kg		
3535300	1,20	0,67	0,60	950	115		
3535310	1,45	0,67	0,60	950	130		

3rd control circuit required


Whether it's bale-handling, pallet loading, log moving or other tasks, compact STOLL tools are all-rounders. They work daily to stand up to tricky, highly diverse tasks.



Fork with grapple – ideal to retrieve and load manure, compost, shrubs and silage

Order no.	Width in m	Height in m	Dept in m	Opening width in mm	Weight in kg		
3535320	1,20	0,69	0,61	950	120		
3535330	1,45	0,69	0,61	950	135		


3rd control circuit required



Grip fork – a must in forestry and landscape maintenance: With the strong tines it grabs bulky tree trunks and branches.

Order no.	Width in m	Opening width in mm	Weight in kg				
3508220	1,15	870	130				

3rd control circuit required



Manure fork – for loading of farmyard manure and compost

Order no.	Width in m	Height in m	Depth in m	Weight in kg			
3509620	1,21	0,56	0,67	68			
3535290	1,45	0,56	0,67	79			



Bale spike – compact bale handling
in narrow courtyards or stables

Order no.	Tine in mm	Weight in kg	Lifting capacity in kg				
3486330	800	60	1000				
Frame							
3486100	–	36					
Bale tine (per unit)							
3486320	800	12					
Optional pallet tine (per unit)							
3486290	800	12					



Pallet fork – the classic to load pallets

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg				
3486070	1.000	800	60				
Frame							
3486100	500	–	36				
Bale tine (per unit)							
3486290	500	800	12				
Optional pallet tine (per unit)							
3486320	800	800	12				



Top loading grip – the ideal complement to the pallet fork,
to retrieve or load logs

Order no.	Opening width in mm	Weight in kg					
3520780	870	40					
For CompactLine pallet fork (has to be ordered separately) 3rd control circuit required							

Log grapple – grab and load logs individually



Order no.	Width in m	Opening width in mm (max.)	Weight in kg				
3556810	0,29	750	115				
Log grapple without boom (can be combined with boom of shovel)							
3611140							
Rotator optional							
3601520							
3rd control circuit required							

Shovel – dig narrow, deep trenches – up to 1,16 m below ground level




Order no.	Width in m	Working depth below ground (m)	Swivel angle	Weight in kg			
3557480	0,30	1,16	118 °	105			
Digging shovel without boom (can be combined with arm of log grapple)							
3611160							
Boom Ditching shovel							
3599580	0,80						
3rd control circuit required							

Three-point-adapter – for the rear mounting of implements for CompactLine onto tractors



Order no.	Payload in kg	Weight in kg					
3601100	500	38					

Looking for an implement to compliment your other brand of loader? We are here to help. That's exactly why we have constructed adapter frames for the CompactLine that allow you to complete your tractor and a previously owned loader from a different brand with our tools.



Attachment frame Euro-Skid – mount implements with Euro-connection onto a Skid Steer attachment frame

Order no.	Weight in kg				
3547310	23,5				



Implement adapter for John Deere Compact Front Loader – real STOLL quality on John Deere compact loaders

Order no.	Weight in kg				
3571680	30				



Distributed by :

Telephone: 418 839-4127
Toll Free: 1 866 718-4746
Fax: 1 800 363-7157

www.mticanada.ca • info@mticanada.ca