

# TITAN

Quality Farm Implements



**THEY'RE NOT ORDINARY. THEY'RE BUILT TO LAST A LONG TIME.**

**TITAN** is a name to trust. We promise dependable service and a quality product you'll be proud to own.

**MTI**  
CANADA

**MTI Canada**  
Toll free : 1 866 718-4746  
Fax : 1 800 363-7157

info@mticanada.ca [www.mticanada.ca](http://www.mticanada.ca)



40"

4'

5'

6'

# Standard Duty Cutter

## LIFT TYPE 3 POINTS

Every TITAN  
Cutter Deck is Primed Before  
Applying a Quality High Gloss  
Paint for a Lasting Finish.



**Designed to last and built to perform for years of service.**

Constructed with durable, channel sidewalls, replaceable skid shoes, **TITAN**'s new Flex Hitch, and solid welds, these cutters have the features that make **TITAN** the best value for your money!

### WARNING

**TITAN** recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

### SPECIFICATIONS

Top Link	Floating
Type Hitch	Category 1
Cutting Capacity	1 1/2" Material
Deck Thickness	11GA Steel
Side Bands	Conduit 7" HD
PTO Drive Shaft	Series 4
Slip Clutch	Optional
Stump Jumper	Pan Stump Jumper
Gear Boxes	<b>40 HP</b>
Wheels	Laminated
Hup	Regreaseable
Front Chain Guard	Optionnel
Rear Chain Guard	Optional
Weight 40"	390 lb
Weight 4'	436 lb
Weight 5'	510 lb
Weights 6'	645 lb
Pull Type	Optional
Remplacable skid shoes	Optional

Specification are subject to change without notice.



# Medium Duty Cutter LIFT TYPE

5'

6'



Every TITAN Cutter Deck is Primed Before Applying a Quality High Gloss Paint for a Lasting Finish.

## SPECIFICATIONS

Top Link	Floating
Type Hitch	CAT I
Cutting Capacity	2" Material
Deck Thickness	11 GA Steel
Side Bands	HD 7" Channel
PTO Drive Shaft	Series 4
Slip Clutch	Optional
Stump Jumper	5/8" Solid Stump Jumper
Gear Boxes	90 HP
Wheels	Laminated
Hub	Regreaseable
Front Chain Guard	Optional
Rear Chain Guard	Optional
Weight 5'	615 lbs.
Weight 6'	755 lbs.
Pull Type	Optional
Skid Shoes	Replaceable
Quick Hitch	Compatible

Specifications are subject to change without notice.

## Engineered for Performance and Built for Years of Dependable Operation.

Starting with 11 gauge steel and years of design, this **TITAN** Medium Duty Cutter provides powerful performance and a smooth cut. Quick hitch compatible with many other great options make this cutter a dependable choice. Also available in Pull Type.

### WARNING

TITAN recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.



5'

6'

7'

# Heavy Duty Cutter LIFT TYPE



7 Gauge Top Deck

8" HD Side Channels



**Heavy Duty Cutting Power  
for TOUGH Applications.  
It Gets the Job Done!**

**TITAN** 's Heavy Duty Cutter is engineered to take on the toughest cutting jobs while providing optional configurations that make it useful in a variety of applications. Built for years of service,

**TITAN**'s solid construction and performance make this implement among the best.

#### WARNING

**TITAN** recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

#### SPECIFICATIONS

Top Link	Floating
Type Hitch	CAT I or CAT II
Cutting Capacity	3" Material
Deck Thickness	3/16" or 7 GA Steel
Side Bands	HD 8" Channel
PTO Drive Shaft	Series 6 w/Slip Clutch
Slip Clutch	Optional
Stump Jumper 5',6'	5/8" Solid Stump Jumper
Stump Jumper 7'	3/4" Solid Stump Jumper
Gear Boxes	90 HP
Wheels	Laminated Dual Tailwheels
Hub	Bearings
Front Chain Guard	Optional
Rear Chain Guard	Optional
Weight 5'	875 lbs.
Weight 6'	1205 lbs.
Weight 7'	1375 lbs.
Pull Type	Optional

Specifications are subject to change without notice.



# Heavy Duty Cutter LIFT TYPE

8'



Every TITAN  
Cutter Deck is Primed Before  
Applying a Quality High Gloss  
Paint for a Lasting Finish.

SPECIFICATIONS	
Cutting Width	93"
Transport Width	98"
Type Hitch	CAT I or CAT II
Cutting Height	2" to 10"
Cutting Capacity	3" dia. material
Deck Thickness	10 GA Steel
Side Bands	HD 8" Channel
Recomm. Min. HP	<b>42 HP</b>
PTO Drive Shaft	Series 5 w/slip clutch
Center Drive Shaft	Shock Coupler Protected
Stump Jumper	5/8" thick, round
Gear Box	100 HP center box
Gear Boxes	2- 90 HP outboard
Wheels	Laminated Dual Tailwheels
Hub	Bearing
Front/Rear Chain Guard	Optional
Weight	1250 lbs.

Specifications are subject to change without notice.

## The 8' Heavy Duty Cutter Gets Your Toughest Jobs Done Easily in Less Time.

TITAN's Heavy Duty 8' Cutter is made for powerful cutting action in larger material and maintains a smooth cut. Take on the tough jobs with a 100 HP/90HP outboard gear box. Our heavy duty components are made to last!

### WARNING

TITAN recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.





10'

# Heavy Duty Cutter LIFT TYPE



## 5200 Series: Extra Heavy Duty Construction with Massive Cutting Power.

Cut the time it takes for your toughest jobs by nearly half what it took in the past!

**TITAN's** 10' Heavy Duty Cutter delivers the cutting power and performance to take on large jobs and constructed to be easy and dependable.

### WARNING

**TITAN:** recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

### SPECIFICATIONS

Cutting Width	116"
Transport Width	122"
Type Hitch	CAT I or CAT II
Cutting Height	2" to 10"
Cutting Capacity	3" dia. material
Deck Thickness	3/16" or 7 GA Steel
Side Bands	HD 8" Channel
Recomm. Min. HP	<b>52 HP</b>
PTO Drive Shaft	Series 5 w/slip clutch
Center Drive Shaft	Shock Coupler Protected
Stump Jumper	5/8" thick, round
Gear Box	100 HP center box
Gear Boxes	2- 90 HP outboard
Wheels	Laminated
Hub	Ball Bearing
Front/Rear Chain Guard	Optional
Weight	1480 lbs.
Quick Hitch	Compatible
Skid Shoes	Replaceable

Specifications are subject to change without notice.



# RED FLEX WING

# 15'

## Flex wing Cutter

Every TITAN Cutter Deck is Primed Before Applying a Quality High Gloss Paint for a Lasting Finish.

### 15'

### SPECIFICATIONS

Recommended Minimum HP	50 HP
Hitch	Swivel Pivot
Deck Thickness	7 Gauge or 3/16"
Body Depth	9.5"
Side Skirt Material	1/4" x 12"
Underneath Deck	Heavily Braced, All Sections
Center/Wing Gearbox Rating	190 HP
Splitter Gearbox Rating	235 HP
Gearcase Power Rating	540 RPM - 1000 Optional
Blades	1/2" x 4"
Blade Tip Speed	15,342 FRM
Blade Overlap	6 1/2"
Blade Carrier (5-year Warranty)	3/4" Round Disc
Cut Width	180"
Overall Width	188"
Overall Length w/ Wheel	186"
Weight	5220 lb.
Cut Height	2" - 15"
Cutting Capacity	Up To 4"
Wheel Type	5 Lug STD Laminated
Row-width Adjustable	Yes
Suspension (Shock Absorbers)	Triple Spring
Wing Flex	90° Up - 22° Down
Input PTO	ASAE CAT 8 Constant Velocity
Wing Drive PTO w/ Slip Clutch	ASAE CAT 6
Skid Shoes	Replaceable
Chain Guards - Front & Rear	Standard
Tow Chains	Standard


Specifications are subject to change without notice.

### WARNING

For non-agricultural use, OSHA, ASAE, SAE and ANSI standards require the use of chain guards at all times. TITAN strongly recommends the use of such guards for agricultural uses, as well as to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by or from contact with the cutting blades.


Laminated Tires  
(Optional Airplane Tires)

Wing  
Hydraulic  
Cylinders

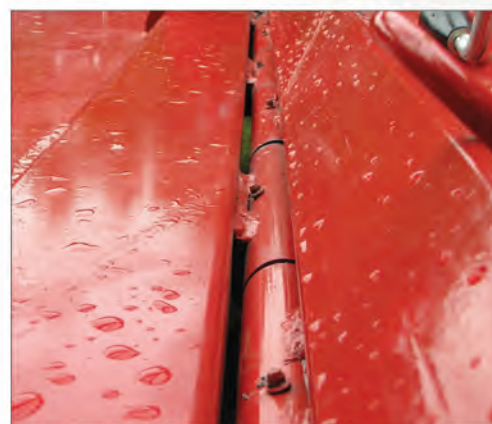


**GREASABLE WING HINGES**  
(8 fittings per wing)



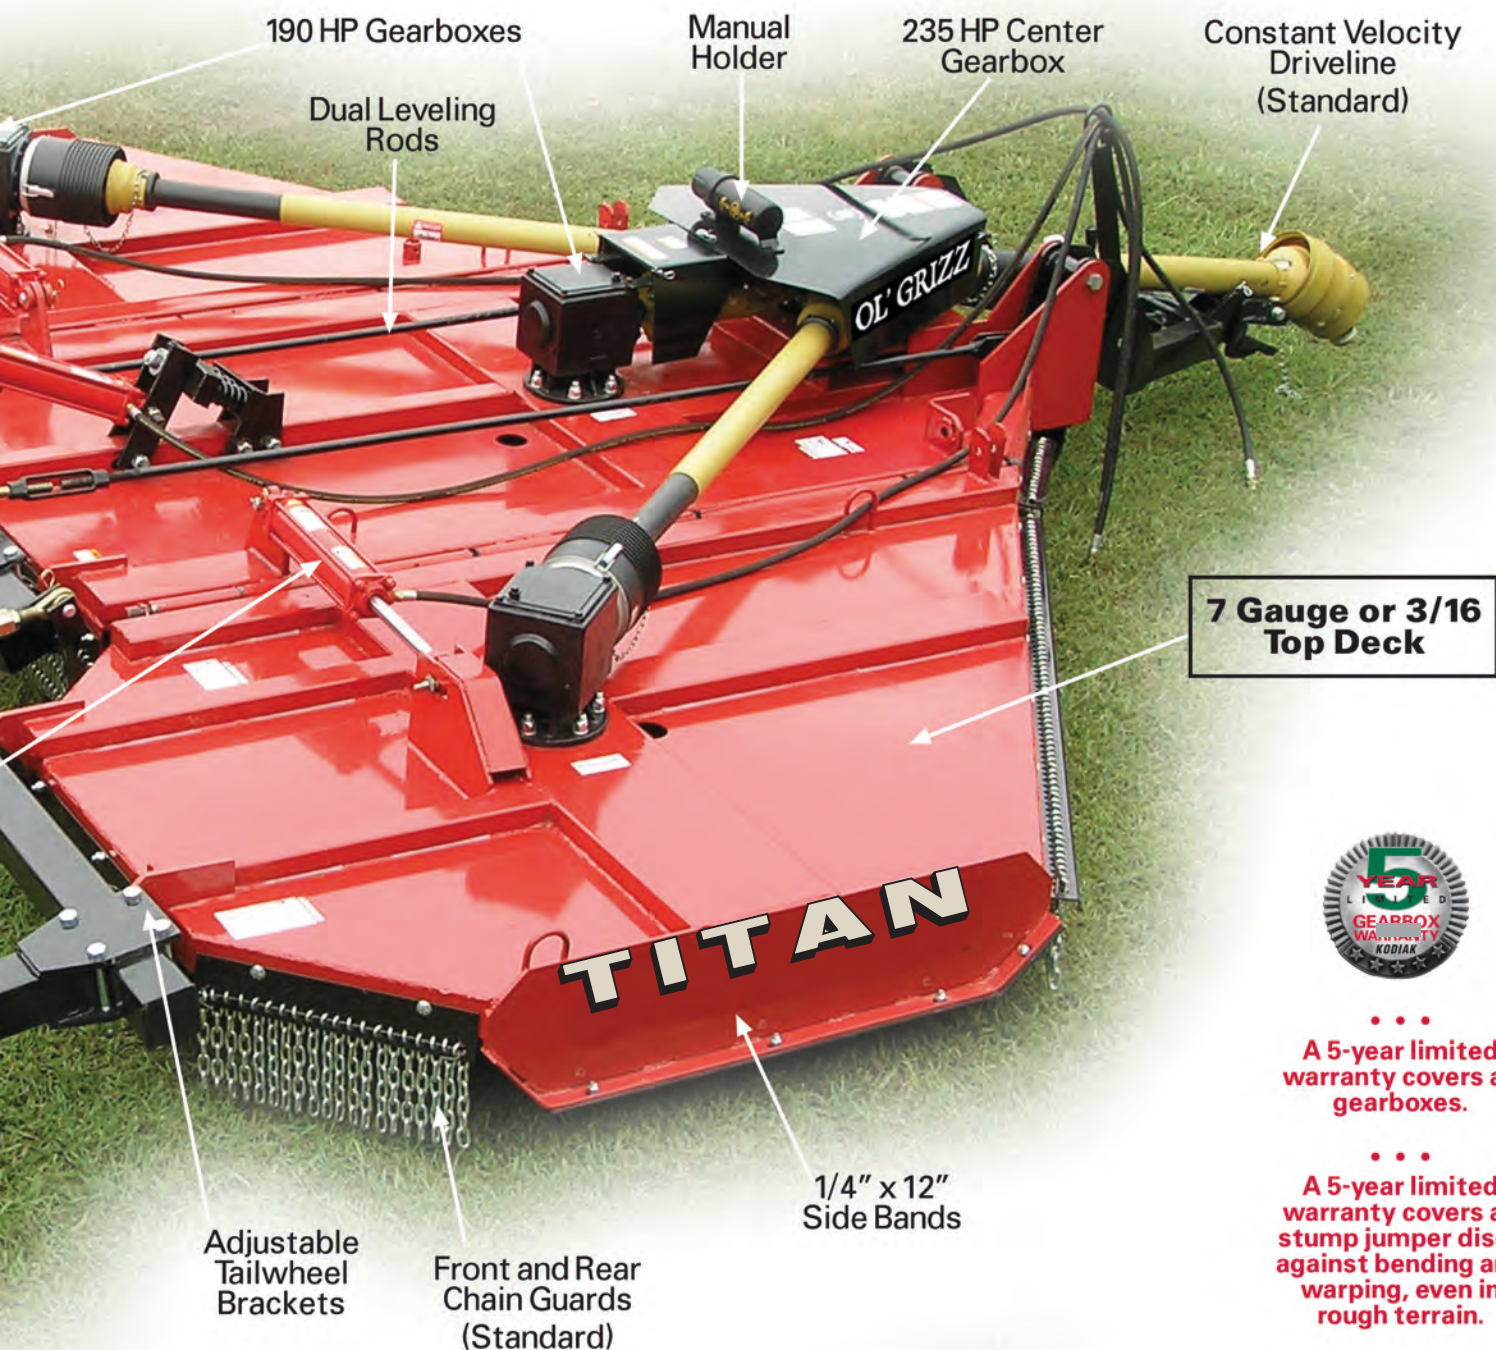

...  
A 5-year limited warranty covers all gearboxes.

...  
A 5-year limited warranty covers all stump jumper discs against bending and warping, even in rough terrain.

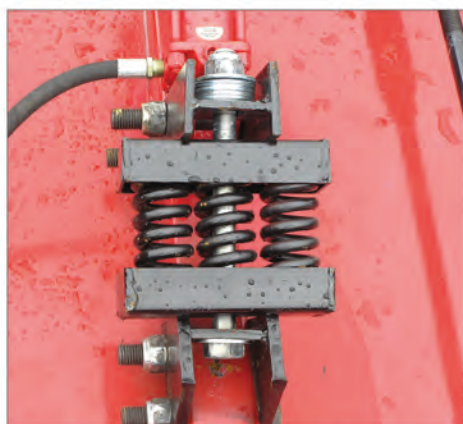

**TRIPLE SPRING SHOCK ASSEMBLY**  
(Tailwheel section)



**SOLID STEEL STUMP JUMPER**  
Round • 3/4" thick



**FLAT SWIVEL HITCH**  
Greatly reduces drawbar wear



## Heavy Duty ▶ Box Scraper

- Extra Heavy A-Frame Arms with Clevis Type Hitch
- Adjustable Ripper Shank
- Replaceable Rips on Shanks
- Dual Reversible Cutting Edges
- 16" x 24" End Plates - 1/2" thick to last!
- Designed for Maximum Material Volume
- Sizes 5', 6', 7', 8'

Accepts CAT I Quick Hitch



## ◀ Standard Box Scraper

- Adjustable Ripper Shank
- Replaceable Rips on Shanks
- Dual Reversible Cutting Edges
- 16" x 24" End Plates
- Designed for Maximum Material Volume
- Sizes 4', 5', 6', 7', 8'

Accepts CAT I Quick Hitch





## Slider Blade

- Slide Adjustable for Tight Spots
- 4', 5', 6', 7' Models have 5 forward and 5 Reverse Angle Positions
- Tilt Feature for Ditching
- 1/2" x 6" Reversible Cutting Edge
- \* Accepts CAT I Quick Hitch

**Our Most Popular Blade!**



## 30 HP SD Blade

- 5', 6', 7' Models have 5 forward and 5 Reverse Angle Positions
- Pan-Tilt Adjustment for Ditching
- Moldboard Height 13 1/2"
- 1/2" x 6" Reversible Cutting Edge
- Slider Blade A-Frame Standard
- \* Accepts CAT I Quick Hitch



## 50 HP MD Blade

- 5', 6', 7' Models have 5 forward and 5 Reverse Angle Positions
- Pan-Tilt Adjustment for Ditching
- Moldboard Height 15 1/2", Extra Reinforced
- 1/2" x 6" Reversible Cutting Edge
- \* Accepts CAT I Quick Hitch



## 50 HP Offset Blade

- 5 Position Offset
- 5', 6', 7' Models have 5 forward and 5 Reverse Angle Positions
- Pan-Tilt Adjustment for Ditching
- Moldboard Height 15 1/2"
- 1/2" x 6" Reversible Cutting Edge
- \* Accepts CAT I Quick Hitch



## 70 HP HD Blade

- 6', 7', 8' Models have 5 forward and 5 Reverse Angle Positions
- Pan-Tilt Adjustment for Ditching
- Accepts CAT I or CAT II Quick Hitch
- Moldboard Height 17 1/2"
- Manual Offsets

Specification are subject to change without notice.




# Farm Implements



## Front Spear

- Heavy Wall Tube Construction
- 2" Adjustable Spear
- Universal Mounting Brackets (Will Fit Most Frontend Loaders)
- Fits 3-Pt. Hitch
- Penetrator Pencil Spear Available

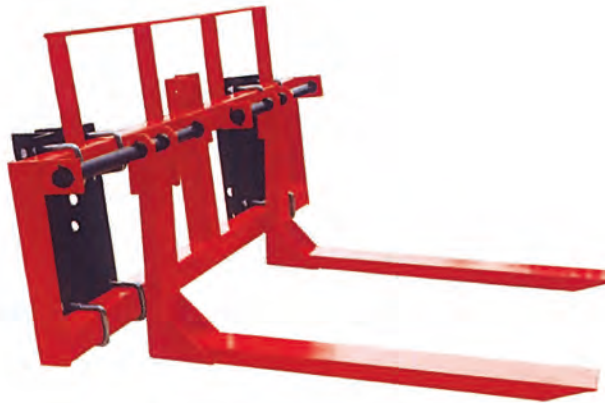

## Pallet Fork


- 2500 lb. Capacity
- Adjustable, Reinforced Channel Tines
- Universal Hookup Will Fit Most Tractors
- Fits Most Tractor Loaders and 3-Pt. Hitch
- Standard Head Guard



## Rear Spear

- 2" Adjustable Spear
- Penetrator Pencil Spear Available

## Bale Fork

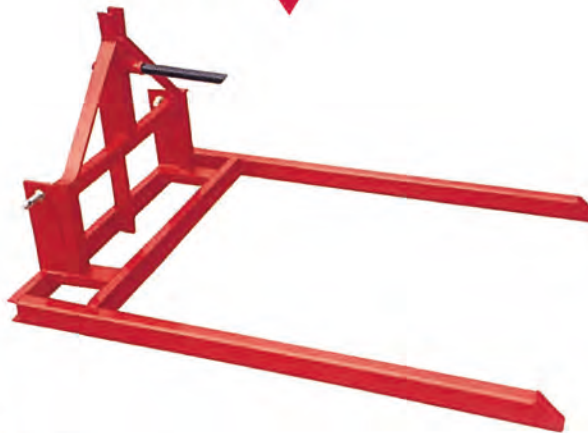

## Trailer Mover



Shipped without Ball



Shipped without Ball

## Trailer Mover - Bale Spear Combo

Specification are subject to change without notice.



## Core Plug Aerators


TITAN Aerators are simply the best buy on the market. Available in Pull Type (with optional wheels) or 3-Pt. hitch design. Both feature a 12" diameter drum that can be filled for additional weight. Made with a solid 1" cold rolled steel axle attached to pillow block bearings for lifespan and better operation.

Utilizing a standard 15/16" x 7" core tine, the unique design allows slight movement during operation to allow easier penetration when encountering subsurface obstacles and enhances release of plugs. This design reduces the possibility of clogged cores. In addition, the 3-pt. hitch frame can accept 16" blocks for added weight when needed.

MODEL	SIZE	TYPE	WT.	FILLED
PL-3	36"	PULL	228	386
PL-4	48"	PULL	284	494
PL-5	60"	PULL	341	604
PL-6	72"	PULL	398	714
PL-7	84"	PULL	455	800
PL3PT-3	36"	3-PT.	303	475
PL3PT-4	48"	3-PT.	365	575
PL3PT-5	60"	3-PT.	427	690
PL3PT-6	72"	3-PT.	488	804
PL3PT-7	84"	3-PT.	549	920


Specifications are subject to change without notice.

**Gauge Wheel  
Kit Optional**

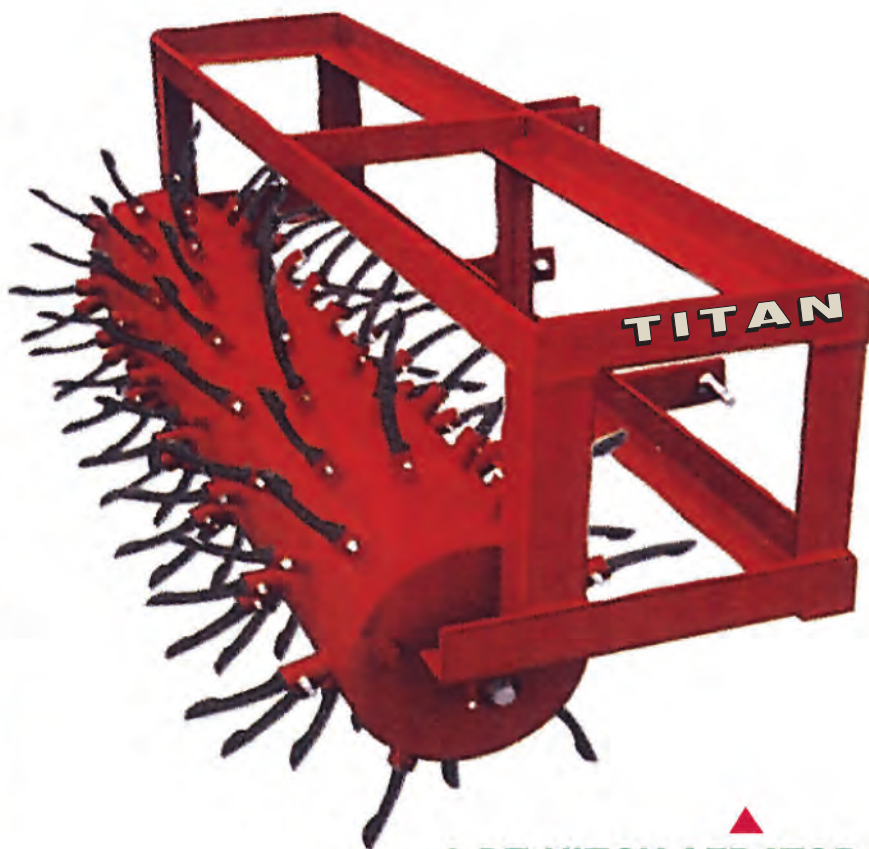

**3-PT. HITCH AERATOR**

Accepts CAT I Quick Hitch

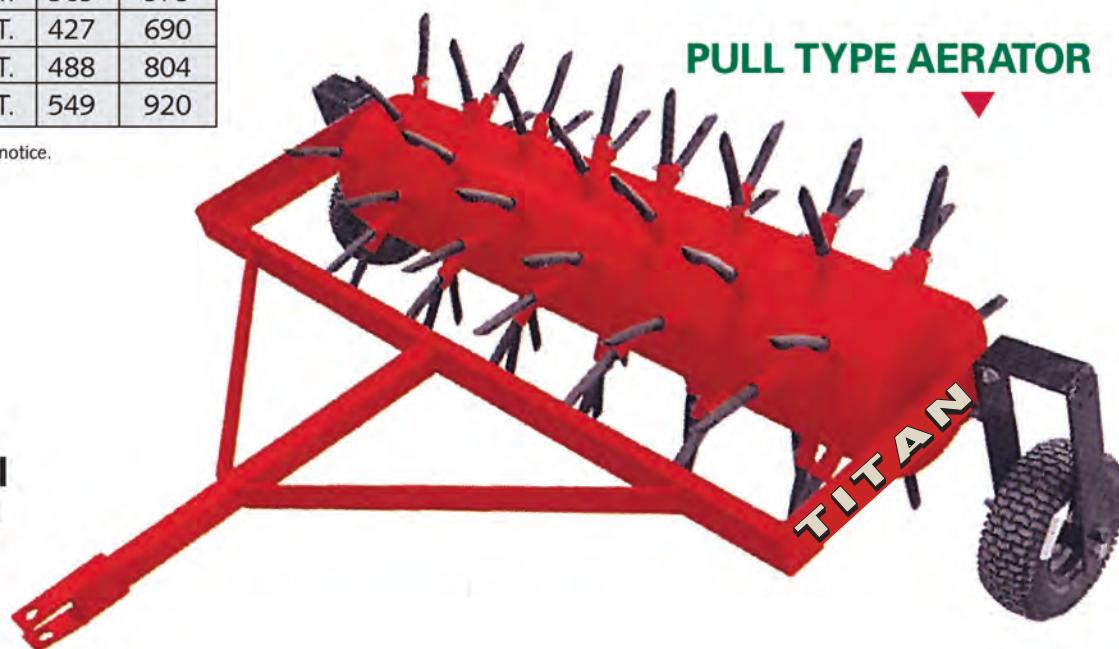


**PULL TYPE AERATOR**

Specification are subject to change without notice.



# Farm Implements

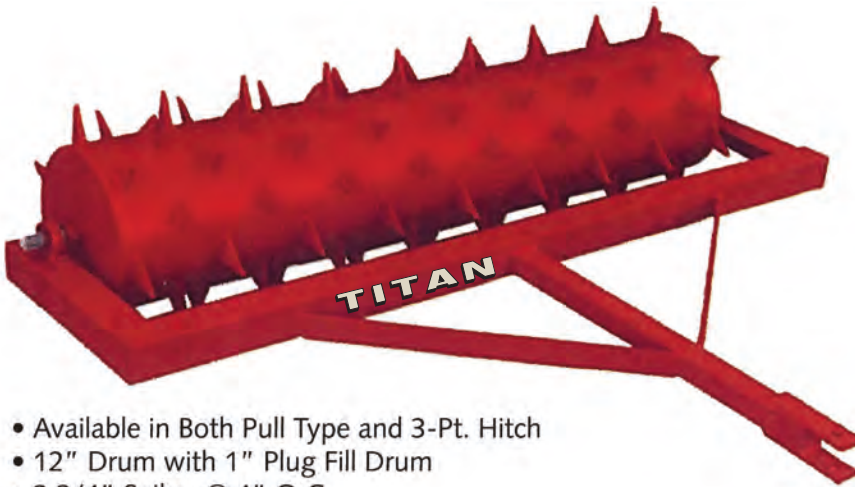

- Available in Both Pull Type and 3-Pt. Hitch
- 12" Drum with 1" Plug Fill Drum
- 2 3/4" Spikes @ 4" O.C.
- 3-Pt. Hitch Frame Made 16" Wide - Capable of Stacking Blocks for Extra Weight
- Optional Gauge Wheel Kit for Pull Type

## Pull Type Aerator

◀ 3-Pt. Hitch Version Available

MODEL	SIZE	TYPE	WT.	FILLED
AR-48-P	48"	PULL	243	453
AR-60-P	60"	PULL	282	545
AR-72-P	72"	PULL	338	654
AR-84-P	84"	PULL	362	700
AR-48-L	48"	3-PT.	293	503
AR-60-L	60"	3-PT.	336	599
AR-72-L	72"	3-PT.	380	696
AR-84-L	84"	3-PT.	425	785
AR-96-L	96"	3-PT.	510	900

Specifications are subject to change without notice.

## 3-Pt. Soil Compactors



TITAN Soil Compactors are made with heavy steel pipe to ensure consistent soil compaction and smoothness. A 1" plug allows the compactors to be filled for additional weight. Wheel packages are available for pull type compactors for easier handling. Available with 12" diameter drums.


MODEL	SIZE	TYPE	WT.	FILLED
3C12	36"	PULL	181	339
4C12	48"	PULL	302	431
5C12	60"	PULL	264	527
6C12	72"	PULL	307	623
7C12	84"	PULL	350	700
3C12-3	36"	3-PT.	255	425
4C12-3	48"	3-PT.	302	512
5C12-3	60"	3-PT.	349	612
6C12-3	72"	3-PT.	394	710

Specifications are subject to change without notice.

## Potato Plow



## HD Boom Pole

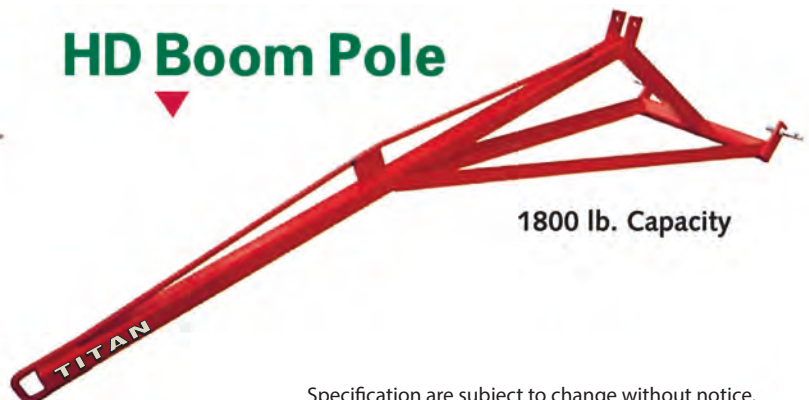

1800 lb. Capacity

Specification are subject to change without notice.



# Skid Steer Mounted Implements

## Pallet Forks



### SPECIFICATIONS

Capacity	4000 lbs
Frame construction	Welded steel
Mounting	"Universal" skid steer
Fork spacing	5" to 40"
Fork carrier	Notched rail
Forks, solid tine	1 1/4" x 4" w/latch
Usable fork length	48"
Weight	365 lbs

- Excellent visibility through solid plate headache rack
- Heavy duty tubing frame
- Easy to adjust rail mount tines
- 48" 4,000 lb capacity tines
- "Universal" skid steer

## Single and Double Bale Spear



### SPECIFICATIONS

	Single	Double
Overall depth	48 1/2"	48 1/2"
Overall height	19 1/2"	19 1/2"
Overall width	45 1/2"	45 1/2"
Spear size	Ø 1.78	Ø 1.78 (2)
Usable spear length	42 1/2"	42 1/2" (2)
Weight	165 lbs	195 lbs
Max spear capacity	2500 lbs @ 23 1/4"	3500 lbs @ 23 1/4"
Integral mounting system	"Universal" skid steer	"Universal" skid steer

- Designed for use on tractor front loaders (and skid steers) utilizing "universal" skid steer attaching system
- Stand alone frame design for easy hooking and unhooking
- Heavy duty 4x4 tubing main frame
- Removable stabilizer spears on single unit
- Fully tapered spears for easier penetration and removal of bales

Specification are subject to change without notice.





# Farm Implements

## Heavy Duty Landscape Rake ▶

### Soil Preparation at Its Best!

- 5/16" x 1" Tempered Tines
- Heavy Duty 3/8" x 5" x 3" Main Frame
- 4 Front & 4 Rear Angle Positions
- Optional Gauge Wheels for Depth Control
- Accepts CAT I Quick Hitch
- Sizes 4', 5', 6', 7', 8'

## Standard Duty Rake ▶

- 5/16" x 1" Tempered Tines
- 5/16" x 4" x 4" Main Frame
- Slider Blade-Type A-Frame
- 4 Front & 4 Rear Angle Positions
- Optional Gauge Wheels for Depth Control
- Sizes 4', 5', 6', 7', 8'

Specification are subject to change without notice.



**MTI Canada**  
**Toll free : 1 866 718-4746**  
**Fax : 1 800 363-7157**

info@mticanada.ca [www.mticanada.ca](http://www.mticanada.ca)

TITAN reserves the right to change models numbers, optional equipment and product specifications without notice.

### **WARNING**

TITAN recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.